


**EcoDim ED-10051 LED
Driver/Trafo 12W 240MA
24-38VDC DIM**

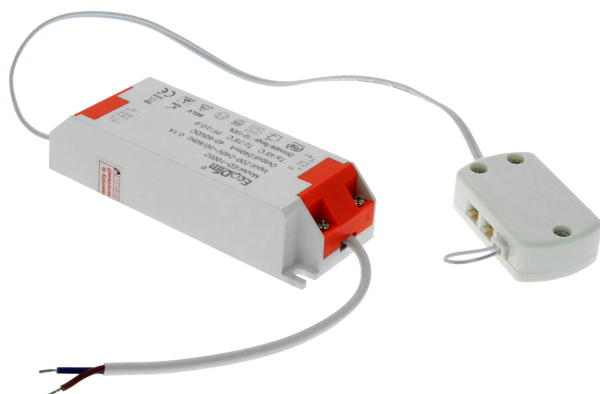

LED maitinimo šaltinis

11858

ECO DIM ED-10051 LED Driver/Trafo 8-12W 24-38VDC 200-240VAC For 3-4 Furniture spots Dimmable

With this dimmable LED driver/transformer from EcoDim you can switch on LED furniture spotlights with electricity. With this driver/transformer you can connect 3 to 4 furniture spots. The driver is supplied with a coupling block. Here you can easily plug in the plugs of the furniture spots. When you do not use a connection port, always put the supplied bridge in the relevant port that you do not use, so that the circuit is complete again. This dimmable LED transformer dims best with a phase-cutting LED dimmer (RC). You can order ED-10044 or ED-10046 as complementary article.

KLASIFIKACIJA

Grupė	Apšvietimo valdymas
Klasė	LED maitinimo šaltiniai
Pavadinimas	EcoDim ED-10051 LED Driver/Trafo 12W 240MA 24-38VDC DIM
Gamintojas	EcoDim
Serija	LED Driver
Tipas	3/4 spots, 8-12W
EAN	8719322372970
Gamintojo kodas	ED-10051

PARAMETRAI

Išėjimo galingumas [W]	12 - 12
Ilgis [mm]	95
Plotis [mm]	39
Versija	Impulsinis
Išėjimo įtampa [V]	24 - 38
Išėjimo srovė [mA]	240 - 240
Apsaugos klasė (IP)	IP20
Reguliavimas 0-10 V	Ne

Reguliavimas 1-10 V	Ne
Reguliavimas DALI	Ne
Reguliavimas DMX	Ne
Reguliavimas DSI	Ne
Reguliavimas GPRS	Ne
Reguliuojantis tinklo jungiklis	Ne
Tinklo įtampos reguliavimas	Ne
Gamintojo pritemdymo sistema	Ne
Krintančio fronto fazės reguliavimas	Taip
Kylančio fronto fazės reguliavimas	Ne
Integruotas reguliavimo potenciometras	Ne
Reguliavimo programavimas	Ne
Reguliavimas radijo bangomis	Ne
Sinusoidės amplitudės reguliavimas	Ne
Reguliavimas prisilietimu	Ne
Reguliavimas mygtuku	Ne
Reguliavimas Zigbee	Ne
Aukštis [mm]	23
Korpusas	Plastikinis korpusas
Nėra reguliavimo	Taip
Elektroaugos klasė	Nenurodyta
Fiksuotos srovės	Taip
Fiksuotos įtampos	Taip
Tinka DC jėgimo įtampai	Taip
Tinka lauko sąlygoms	Ne
Galimas IFTTT palaikymas	Ne
Suderinama su Amazon Alexa	Ne
Suderinama su Google Assistant	Ne
Suderinama su Apple HomeKit	Ne
Pastovaus šviesos srauto palaikymas (CLO)	Ne