


## LED Corn Switch E40 54W-80W 7300-11600lm 3000K-5000K

LED lempa

11321

BAI LED Corn Switch E40 54W=7300lm 63W=8800lm  
80W=11600lm 3000K 4000K 5000K 100V-260V 360°  
130x250mm IP64 120V-130V 230V-240V DISCONNECT  
BALLAST

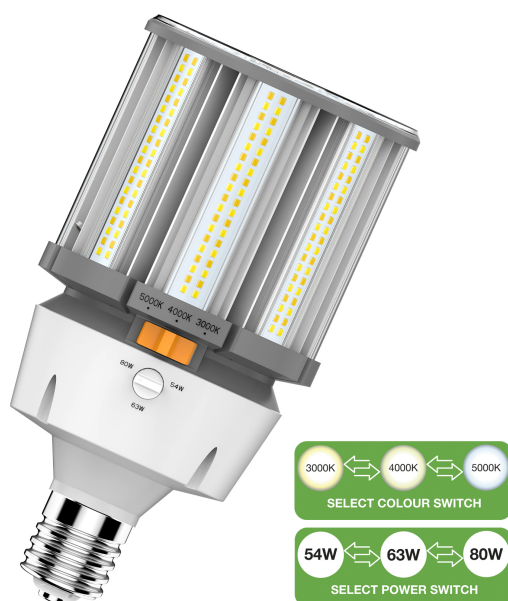

Sustainability is not only about replacing old light sources with a more energy-efficient version, but also about reusing existing fixtures. It is even more sustainable when 9 different versions are combined in 1 product. This saves on transport and storage. The special thing about the Switch series is that by simply adjusting a switch, the power (54W, 63W or 80W) and the light color can change (3000K, 4000K or 5000K). That's Smart and Green Thinking. Installation: disconnect the ballast before use. AC 100-260V 50/60Hz. Burning position: universal. Only suitable for temperatures up to 45°C inside the fixture. The LED light source can quickly malfunction due to overheating. Therefore not suitable for use in tight fixtures or fixtures where the reflector is close to the LED Corn. Recommended to remove glass or cover from the fixture.

Pastaba:

- Kaip apsaugą nuo viršįtampių iki 10kV, siūlome naudoti ribotuvą kodu 78265.

## KLASIFIKACIJA

Grupė	Lempos
Klasė	Šviesos diodų lempos
Pavadinimas	LED Corn Switch E40 54W-80W 7300-11600lm 3000K-5000K
Gamintojas	BAI
Serija	LED Corn
Tipas	Switch
EAN	8714681457917
Gamintojo kodas	145791

## PARAMETRAI

Lizdas	E40
Lempos galia [W]	54 - 80
Nominali įtampa [V]	100 - 260

Įtampos tipas	AC
Nominali srovė [mA]	888 - 888
Lempos forma	Vamzdis su jungtimi 1 gale
Spalvinė temperatūra [K]	3000 - 5000
Spalva	Balta
Spalvų atkūrimo koeficientas CRI	80-89
Šviesos srautas [lm]	7300 - 11600
Spalvinė temperatūra pagal EN 12464-1	Neutrali balta 3300-5300 K
Lempos efektyvumas [lm/W]	145
Spinduliavimo kampas [°]	360 - 360
Diametras [mm]	130
Ilgis [mm]	250
Energetinio efektyvumo klasė	D
Siūlelinio tipo leputės	Ne
Energijos sąnaudos 1000 h [kWh]	80
Vidutinis tarnavimo laikas [h]	50000
Spalvos atitikimas (McAdamo elipsė)	SDCM4
Korpuso spalva	Balta
Apsaugos klasė (IP)	IP64
Reguliuojama	Ne
Paskirtis	Kita
Minimalus įjungimo ciklų skaičius	12000
Fotobiologinė sauga pagal EN 62471	RG0
Galios faktorius	0.9
Valdymo galimybė	Ne
Stiklo gaubto tipas	Skaidri
Su nuotolinio valdymo pulteliu	Ne
Galimas IFTTT palaikymas	Ne
Suderinama su Amazon Alexa	Ne
Suderinama su Google Assistant	Ne
Suderinama su Apple HomeKit	Ne