



MASTER SOX-E

MASTER SOX-E 26W BY22d 1SL/12

Low Pressure Sodium lamp with improved efficacy

Product data

General Information	
Cap-Base	BY22D [BY22d]
Operating Position	H110 [Hanging +/-110D or Base Up (BU)]
Life to 5% Failures (Nom)	6000 h
Life to 20% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	18000 h
Light Technical	
Luminous Flux (Rated) (Nom)	3700 lm
Lumen Maintenance 2000 h (Nom)	95 %
Lumen Maintenance 5000 h (Nom)	95 %
Correlated Color Temperature (Nom)	1800 K
Luminous Efficacy (rated) (Nom)	140 lm/W
Operating and Electrical	
Power (Rated) (Nom)	27.0 W
Lamp Current (EM) (Nom)	0.37 A
Voltage (Nom)	69 V
Controls and Dimming	
Dimmable	No

Approval and Application	
Energy Efficiency Label (EEL)	A++
Mercury (Hg) Content (Nom)	0 mg
Energy Consumption kWh/1000 h	31 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	150 °C
Cap-Base Temperature (Max)	150 °C


Product Data	
Full product code	871150017974615
Order product name	MASTER SOX-E 26W BY22d 1SL/12
EAN/UPC - Product	8711500179746
Order code	928145700008
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928145700008
Net Weight (Piece)	0.225 kg
ILCOS Code	LSE-E26-BY22d

Warnings and Safety

- Lamps may use electronic or electromagnetic control gear

MASTER SOX-E


Dimensional drawing



Product	D (max)	C (max)
MASTER SOX-E 26W BY22d 1SL/12	52 mm	311 mm



SOX E 26W BY22d T50

Photometric data

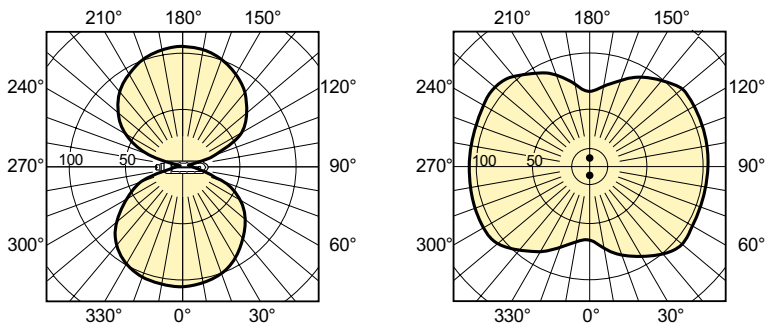

SOX-E

Lifetime

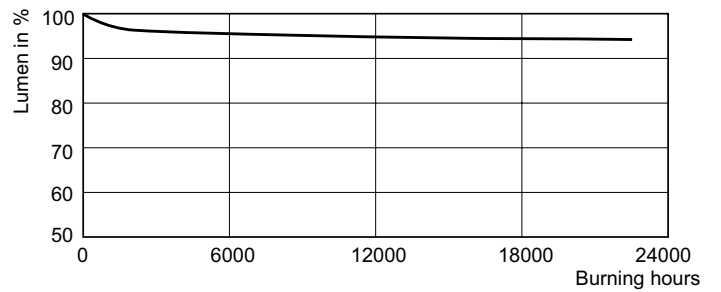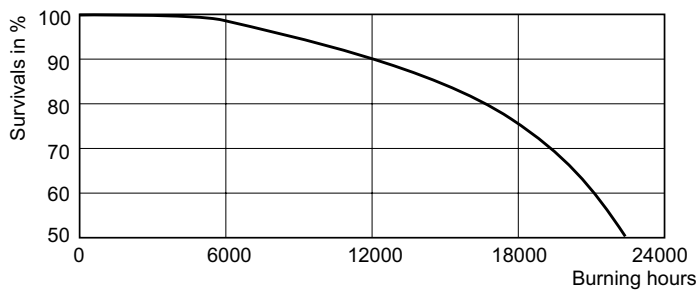

SOX-E

SOX-E

