

# PHILIPS

## Lighting



# MASTERColour CDM-T Elite

## MASTERColour CDM-T Elite 150W/930 G12 1CT/12

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

### Product data

#### General Information

Cap-Base	G12 [ G12]
Operating Position	P10 [ Parallel +/-10D or Horizontal(HOR)]
Life to 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life to 20% Failures (Nom)	11000 h
Life to 50% Failures (Nom)	12000 h
ANSI Code HID	-

#### Light Technical

Color Code	930 [ CCT of 3000K]
Luminous Flux (Rated) (Nom)	14600 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 12000 h (Nom)	73 %
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	91 %
Lumen Maintenance 4000 h (Nom)	86 %
Lumen Maintenance 5000 h (Nom)	84 %
Chromaticity Coordinate X (Nom)	0.443
Chromaticity Coordinate Y (Nom)	0.391
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	98 lm/W
Color Rendering Index (Min)	89
Color Rendering Index (Nom)	92

#### Operating and Electrical

Power (Nom)	149 W
Lamp Current Run-Up (Max)	2.5 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	86 V
Voltage (Nom)	92 V

#### Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min


# MASTERCcolour CDM-T Elite

Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	9.5 mg
Energy Consumption kWh/1000 h	164 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3
Luminaire Design Requirements	
Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C

Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871150021312915
Order product name	MASTERCcolour CDM-T Elite 150W/930 G12 1CT/12
EAN/UPC - Product	8711500213129
Order code	928094705125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928094705125
Net Weight (Piece)	0.031 kg
ILCOS Code	MT/UB-150/930-H-G12-21/100

## Warnings and Safety


### Dimensional drawing



CDM-T Elite 150W/930 G12

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-T Elite 150W/930 G12 1CT/12	20 mm	9 mm	55 mm	57 mm	56 mm	110 mm



### Photometric data

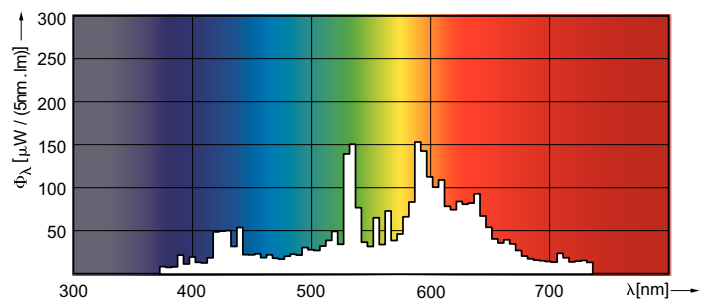

LDPO\_CDM-T-E\_150W\_930-Spectral power distribution Colour

# MASTERCcolour CDM-T Elite

## Lifetime

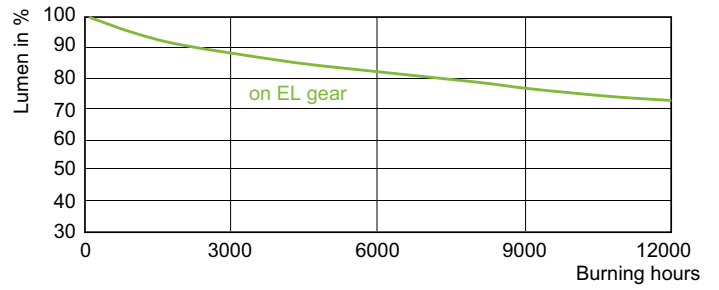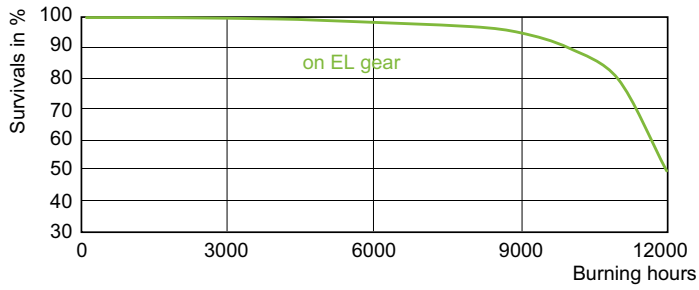

LDLE\_CDM-T-E\_150W\_930-Life expectancy diagram

