



MASTER PL-S 4 Pin

MASTER PL-S 11W/840/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 2 parallel narrow fluorescent tubes

Product data

General Information	
Cap-Base	2G7 [2G7]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	92 %
LSF Preheat 16000 h Rated	30 %
Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux (Nom)	900 lm
Luminous Flux (Rated) (Nom)	900 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	95 %
LLMF 4000 h Rated	92 %
Depreciation 5000 hrs	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	86 %
Operating and Electrical	
Power (Rated) (Nom)	11.6 W

Lamp Current (Nom)	0.160 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	13 kWh
Product Data	
Full product code	871150026122970
Order product name	MASTER PL-S 11W/840/4P 1CT/5X10BOX
EAN/UPC - Product	8711500261229
Order code	26122970
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927936684011
Net Weight (Piece)	41.000 g


MASTER PL-S 4 Pin

ILCOS Code

FSD-11/40/1B-E-2G7

Warnings and Safety

Dimensional drawing




PL-S 11W/840/4P LM


Product

MASTER PL-S 11W/840/4P 1CT/5X10BOX

Photometric data


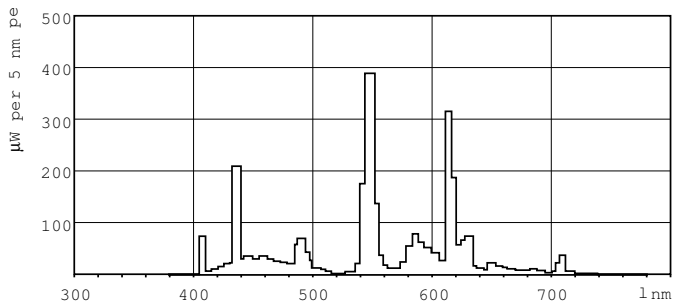


Lightcolour /840

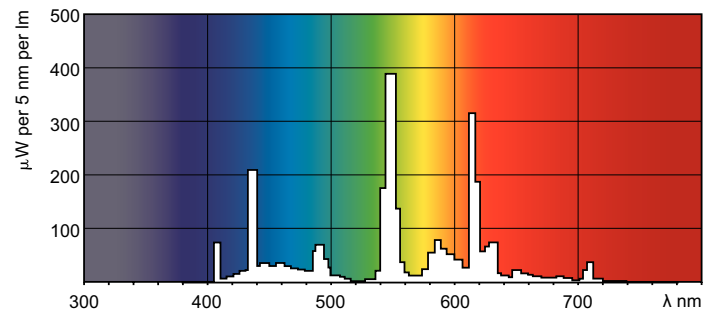

Lightcolour /840

Lifetime

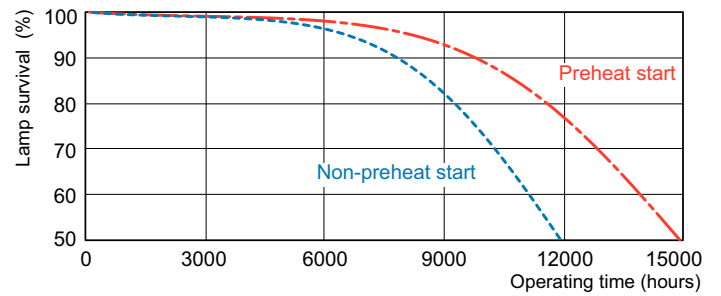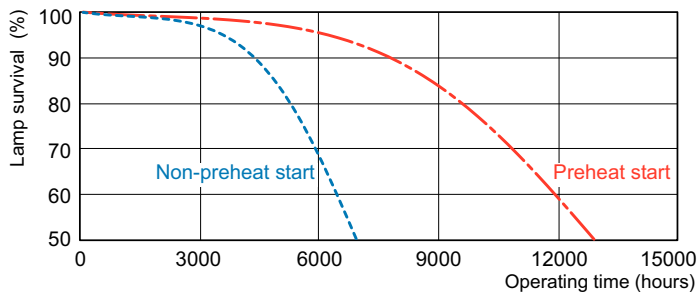

LDLE_PLS4PLM_0001-Life expectancy diagram

MASTER PL-S 4 Pin

Lifetime

