



PL-Q 4 Pin

PL-Q 38W/830/4P 1CT/10BOX

Compact fluorescent lamps with a quadrant-like shape

Product data

General Information	
Cap base	GR10Q [GR10q]
Life to 50% failures preheat (nom.)	12000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	95 %
LSF Preheat 8000 h Rated	89 %
LSF Preheat 16000 h Rated	22 %
LSF Preheat 20000 h Rated	4 %

Light Technical	
Colour code	830 [CCT of 3,000 K]
Luminous flux (nom.)	2850 lm
Luminous flux (rated) (nom.)	2850 lm
Colour designation	Warm white (WW)
Correlated colour temperature (nom.)	3000 K
Luminous efficacy (rated) (nom.)	75 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	90 %
LLMF 4000 h Rated	86 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	80 %
LLMF 12000 h Rated	79 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	78 %

Operating and Electrical	
Power (Rated) (Nom)	35.5 W
Lamp current (nom.)	0.430 A

Temperature	
Design temperature (nom.)	25 °C

Controls and Dimming	
Dimmable	yes

Mechanical and Housing	
Cap base information	4P

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	4 mg
Energy Consumption kWh/1000 h	42 kWh


Product Data	
Full product code	871150027172325
Order product name	PL-Q 38W/830/4P 1CT/10BOX
EAN/UPC – product	8711500271723
Order code	27172325
Local Code	38PLQ8304PIN
Numerator – quantity per pack	1
Numerator – packs per outer box	10

PL-Q 4 Pin

Material no. (12NC)	927939483040
Net weight (piece)	129.000 g
ILCOS Code	FSS-38/30/1B-E-GR10q

Warnings and Safety

Dimensional drawing




PL-Q 38W/830/4P

Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 38W/830/4P 1CT/10BOX	46.5 mm	18.9 mm	33 mm	203 mm	76 mm	41 mm	200 mm

Photometric data



...

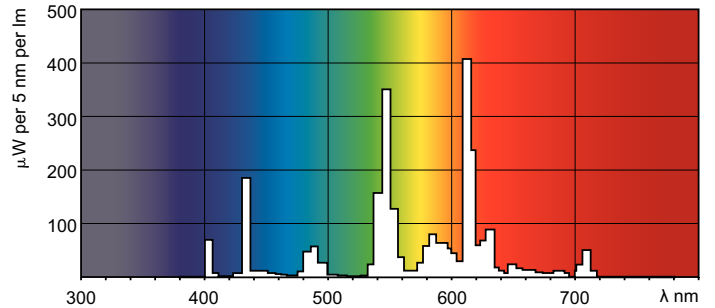

Lightcolour /830

Lightcolour /830

Lifetime



PL-Q 4 Pin

Lifetime

