



PL-Q 4 Pin

PL-Q 16W/835/4P 1CT/10BOX

Compact fluorescent lamps with a quadrant-like shape

Product data

General Information	
Cap-Base	GR10Q [GR10q]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	95 %
LSF Preheat 8000 h Rated	89 %
LSF Preheat 16000 h Rated	22 %
LSF Preheat 20000 h Rated	4 %

Light Technical	
Colour Code	835 [CCT of 3500K]
Luminous Flux (Nom)	1050 lm
Luminous Flux (Rated) (Nom)	1050 lm
Colour Designation	White (WH)
Colour Temperature, horizontal (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	66.6 lm/W
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	90 %
LLMF 4000 h Rated	86 %
Depreciation 5000 hrs	83 %
LLMF 8000 h Rated	80 %
LLMF 12000 h Rated	79 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	78 %

Operating and Electrical	
Power (Rated) (Nom)	16.0 W
Lamp Current (Nom)	0.195 A

Temperature	
Design Temperature (Nom)	25 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	4P

Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	4 mg
Energy Consumption kWh/1000 h	18 kWh


Product Data	
Full product code	871150027206525
Order product name	PL-Q 16W/835/4P 1CT/10BOX
EAN/UPC - Product	8711500272065
Order code	27206525
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927939183540

PL-Q 4 Pin

Net Weight (Piece)	68.000 g
ILCOS Code	FSS-16/35/1B-E-GR10q

Warnings and Safety

Dimensional drawing




PL-Q 16W/835/4P

Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 16W/ 835/4P 1CT/ 10BOX	40 mm	13.7 mm	27.5 mm	138 mm	49 mm	40.5 mm	135 mm

Photometric data



...

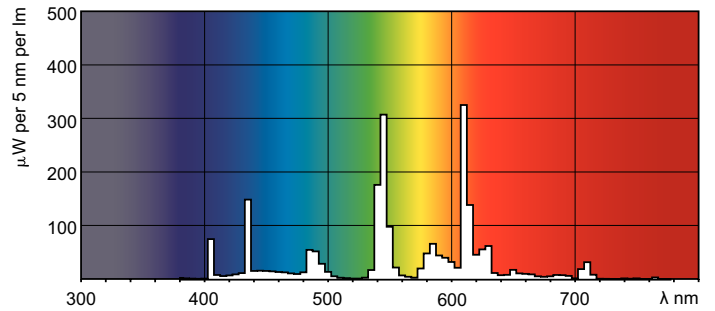

Lightcolour /835

Lightcolour /835

Lifetime



PL-Q 4 Pin

Lifetime

