



# MASTER TL-E Circular Super 80

## TL-E 32W/840 1CT/12

Low-pressure mercury discharge lamps with a circular 26 mm tube

### Product data

General Information	
Cap-Base	G10Q [ G10q]
Life to 50% Failures (Nom)	13000 h
LSF 2000 h Rated	98 %
LSF 4000 h Rated	77 %
LSF 6000 h Rated	60 %
LSF 8000 h Rated	45 %
Light Technical	
Colour Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	2375 lm
Luminous Flux (Rated) (Nom)	2375 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	74 lm/W
Colour Rendering Index horiz (Nom)	80
Depreciation 2000 hrs	84 %
LLMF 4000 h Rated	79 %
Depreciation 5000 hrs	75 %
LLMF 8000 h Rated	73 %
Operating and Electrical	
Power (Rated) (Nom)	32.0 W

Lamp Current (Nom)	0.450 A
Voltage (Nom)	81 V
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	8 mg
Energy Consumption kWh/1000 h	35 kWh
Product Data	
Full product code	871150055968515
Order product name	TL-E 32W/840 1CT/12
EAN/UPC - Product	8711500559685
Order code	55968515
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928026384070
Net Weight (Piece)	0.180 kg


# MASTER TL-E Circular Super 80

ILCOS Code

FSC-32/40/1B-E-G10q-29/299

## Warnings and Safety

## Dimensional drawing




TL-E 32W/840


## Product

TL-E 32W/840 ICT/12

## Photometric data

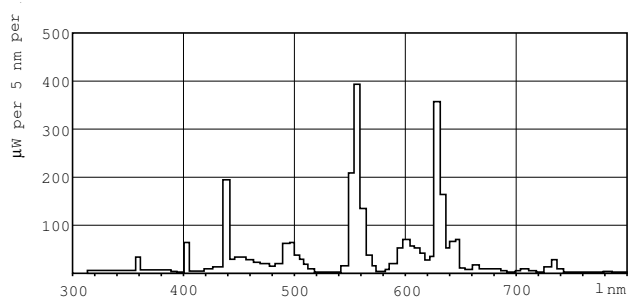

Lightcolour /840

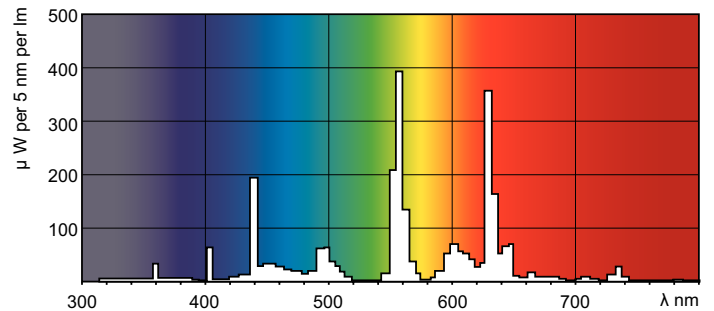

Lightcolour /840

