



MASTER PL-T 2 Pin

MASTER PL-T 18W/840/2P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

Product data

General Information	
Cap base	GX24D-2 [GX24d-2]
Life to 10% failures (nom.)	6500 h
Life to 50% failures (nom.)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %
Light Technical	
Colour code	840 [CCT of 4,000 K]
Luminous flux (nom.)	1200 lm
Luminous flux (rated) (nom.)	1200 lm
Colour designation	Cool White (CW)
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (min.)	67 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	18 W


Lamp current (nom.)	0.225 A
Temperature	
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Cap base information	2P
Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	22 kWh
Product Data	
Full product code	871150061061470
Order product name	MASTER PL-T 18W/840/2P 1CT/5X10BOX
EAN/UPC – product	8711500610614
Order code	61061470
Local Code	18PLT8402PINCS
Numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (12NC)	927914384071

MASTER PL-T 2 Pin

Net weight (piece)	59.000 g
ILCOS Code	FSM-18/40/1B-I-GX24d=2

Warnings and Safety


Dimensional drawing




PL-T 18W/840/2P M

Product	MASTER PL-T 18W/840/2P 1CT/5X10BOX
---------	------------------------------------

Photometric data

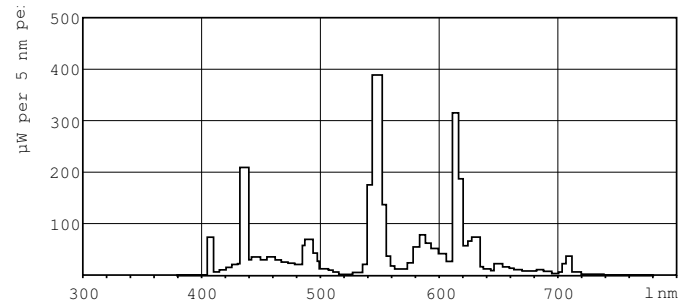


Lightcolour /840

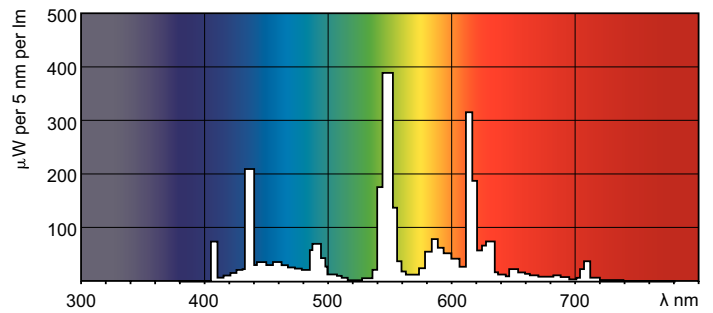


Lightcolour /840

Lifetime

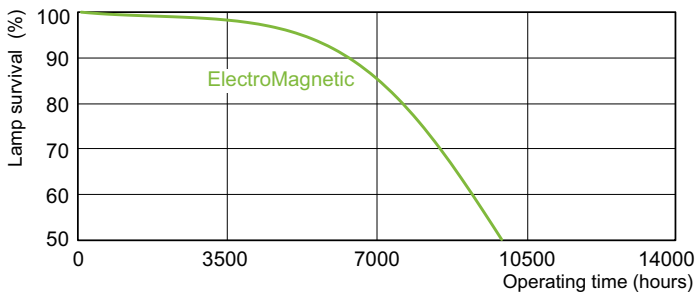

LDLE_PLT2PN_0001-Life expectancy diagram

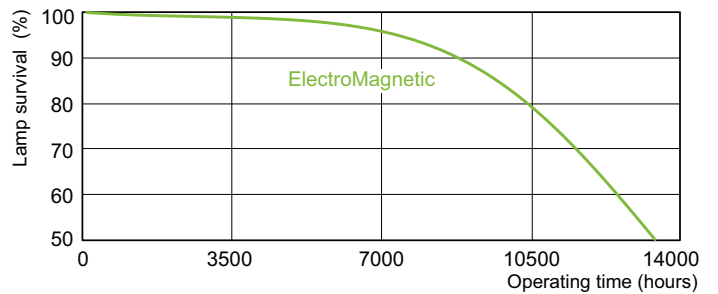

LDLE_PLT2PN_0002-Life expectancy diagram

MASTER PL-T 2 Pin

Lifetime

