



# MASTER PL-T 4 Pin

## MASTER PL-T 18W/830/4P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

### Product data

General Information	
Cap-Base	GX24Q-2 [ GX24q-2]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %
Light Technical	
Colour Code	830 [ CCT of 3000K]
Luminous Flux (Nom)	1200 lm
Luminous Flux (Rated) (Nom)	1200 lm
Colour Designation	Warm White (WW)
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (Rated) (Min)	67 lm/W
Colour Rendering Index horiz (Nom)	>80
Depreciation 2000 hrs	92 %
LLMF 4000 h Rated	88 %
Depreciation 5000 hrs	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	16.5 W

Lamp Current (Nom)	0.225 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	20 kWh
Product Data	
Full product code	871150061076870
Order product name	MASTER PL-T 18W/830/4P 1CT/5X10BOX
EAN/UPC - Product	8711500610768
Order code	61076870
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927914483071
Net Weight (Piece)	58.000 g


# MASTER PL-T 4 Pin

ILCOS Code

FSM-18/30/1B-E-GX24q-2

## Warnings and Safety

### Dimensional drawing




PL-T 18W/830/4P M


### Product

MASTER PL-T 18W/830/4P 1CT/5X10BOX

### Photometric data

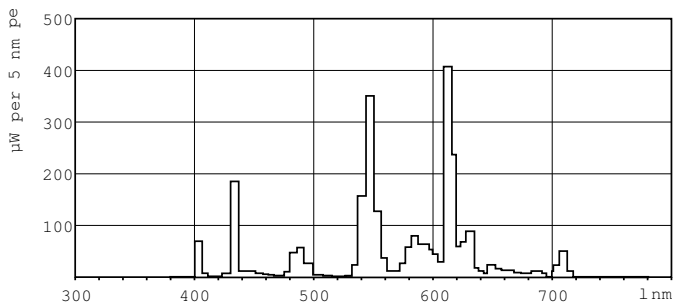


Lightcolour /830

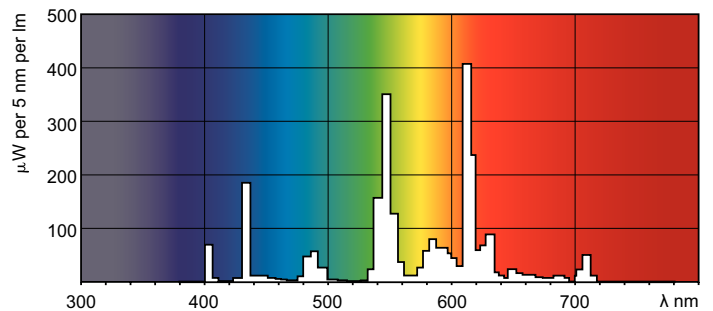

Lightcolour /830


### Lifetime

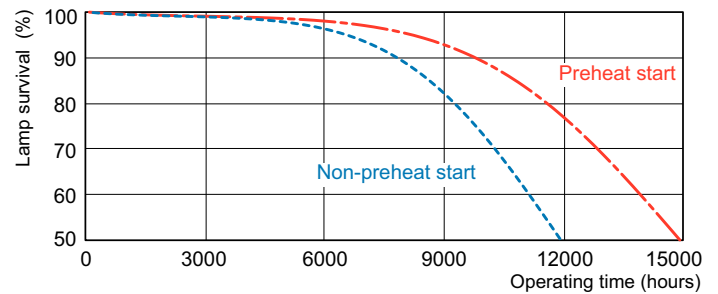

LDLE\_PLT4PN\_0002-Life expectancy diagram

# MASTER PL-T 4 Pin

## Lifetime

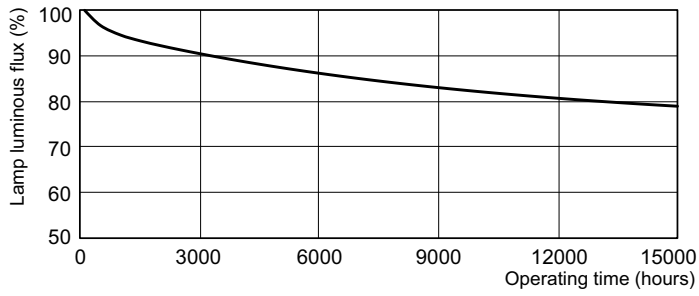

LDLM\_PLT4PN\_0001-Lumen maintenance diagram

