



# MASTER PL-T 4 Pin

## MASTER PL-T 18W/840/4P 1CT/5X10BOX

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

### Product data

General Information	
Cap base	GX24Q-2 [ GX24q-2]
Life to 50% failures preheat (nom.)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %
Light Technical	
Colour code	840 [ CCT of 4,000 K]
Luminous flux (nom.)	1200 lm
Luminous flux (rated) (nom.)	1200 lm
Colour designation	Cool White (CW)
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (min.)	67 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	16.5 W


Lamp current (nom.)	0.210 A
Temperature	
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	yes
Mechanical and Housing	
Cap base information	4P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	20 kWh
Product Data	
Full product code	871150061099770
Order product name	MASTER PL-T 18W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500610997
Order code	61099770
Local Code	18PLT8404P1NCS
Numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (I2NC)	927914484071

# MASTER PL-T 4 Pin

Net weight (piece)	58.000 g
ILCOS Code	FSM-18/40/1B-E-GX24q=2

## Warnings and Safety

## Dimensional drawing



PL-T 18W/840/4P M


## Photometric data

Lightcolour /840


Lightcolour /840

## Lifetime

Product	MASTER PL-T 18W/840/4P 1CT/5X10BOX
---------	------------------------------------

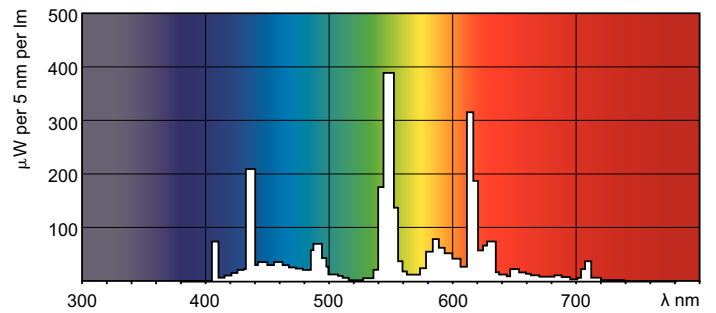

Lightcolour /840

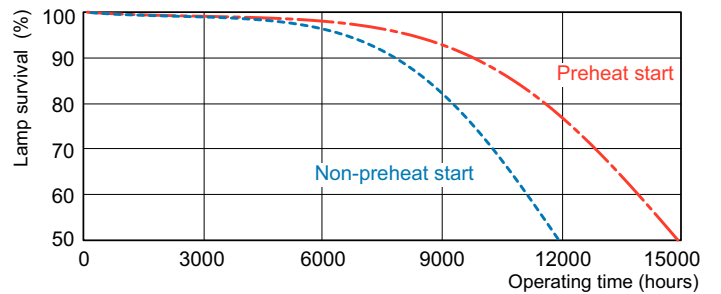

LDLE\_PLT4PN\_0002-Life expectancy diagram

# MASTER PL-T 4 Pin

## Lifetime



LDLM\_PLT4PN\_0001-Lumen maintenance diagram

