



MASTER PL-T 2 Pin

MASTER PL-T 26W/830/2P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

Product data

General Information	
Cap-Base	GX24D-3 [GX24d-3]
Life To 10% Failures (Nom)	6500 h
Life to 50% Failures (Nom)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %
Light Technical	
Colour Code	830 [CCT of 3000K]
Luminous Flux (Nom)	1800 lm
Luminous Flux (Rated) (Nom)	1725 lm
Colour Designation	Warm White (WW)
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (Rated) (Min)	66 lm/W
Colour Rendering Index horiz (Nom)	>80
Depreciation 2000 hrs	92 %
LLMF 4000 h Rated	87 %
Depreciation 5000 hrs	84 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	26.0 W


Lamp Current (Nom)	0.335 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2P
Approval and Application	
Energy Efficiency Label	B
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	32 kWh
Product Data	
Full product code	871150061102470
Order product name	MASTER PL-T 26W/830/2P 1CT/5X10BOX
EAN/UPC - Product	8711500611024
Order code	61102470
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927914583071
Net Weight (Piece)	66.000 g

MASTER PL-T 2 Pin

ILCOS Code FSM-26/30/1B-I-GX24d=3

Warnings and Safety

Dimensional drawing




PL-T 26W/830/2P M


Product

MASTER PL-T 26W/830/2P 1CT/5X10BOX

Photometric data

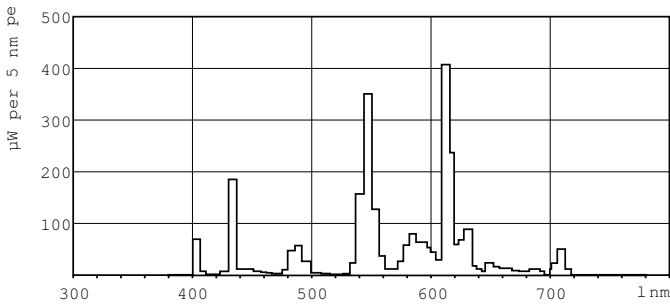


Lightcolour /830

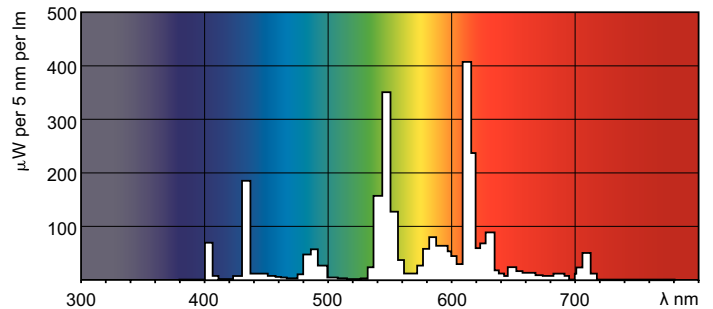


Lightcolour /830

Lifetime

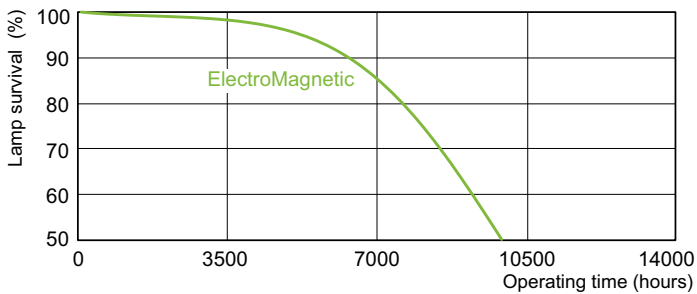

LDLE_PLT2PN_0001-Life expectancy diagram

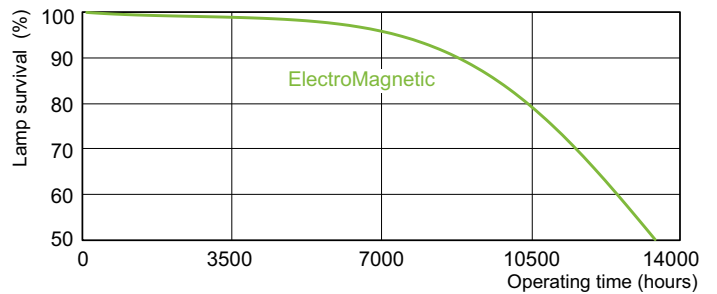

LDLE_PLT2PN_0002-Life expectancy diagram

MASTER PL-T 2 Pin

Lifetime

