



MASTER PL-T 4 Pin

MASTER PL-T 57W/830/4P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

Product data

General Information		Lamp Current (Nom)	
Cap-Base	GX24Q-5 [GX24q-5]		0.325 A
Life to 50% Failures Preheat (Nom)	13000 h	Temperature	
LSF Preheat 2000 h Rated	99 %	Design Temperature (Nom)	28 °C
LSF Preheat 4000 h Rated	98 %	Controls and Dimming	
LSF Preheat 6000 h Rated	97 %	Dimmable	Yes
LSF Preheat 8000 h Rated	90 %	Mechanical and Housing	
Light Technical		Cap-Base Information	4P
Colour Code	830 [CCT of 3000K]	Approval and Application	
Luminous Flux (Nom)	4300 lm	Energy Efficiency Label	A
Luminous Flux (Rated) (Nom)	4200 lm	Mercury (Hg) Content (Nom)	1.4 mg
Colour Designation	Warm White (WW)	Energy Consumption kWh/1000 h	59 kWh
Colour Temperature, horizontal (Nom)	3000 K	Product Data	
Luminous Efficacy (Rated) (Min)	75 lm/W	Full product code	871150061140670
Colour Rendering Index horiz (Nom)	>80	Order product name	MASTER PL-T 57W/830/4P 1CT/5X10BOX
Depreciation 2000 hrs	92 %	EAN/UPC - Product	8711500611406
LLMF 4000 h Rated	88 %	Order code	61140670
Depreciation 5000 hrs	86 %	Numerator - Quantity Per Pack	1
LLMF 8000 h Rated	84 %	Numerator - Packs per outer box	50
LLMF 12000 h Rated	81 %	Material Nr. (12NC)	927914983071
Operating and Electrical		Net Weight (Piece)	101.000 g
Power (Rated) (Nom)	56.0 W		

MASTER PL-T 4 Pin

ILCOS Code FSM6H-57/30/1B-L/P-GX24q=5

Warnings and Safety


Dimensional drawing

n


Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T 57W/830/4P 1CT/ 5X10BOX	41.0 mm	157.7 mm	182.0 mm	197.7 mm

PL-T 57W/830/4P M

Photometric data

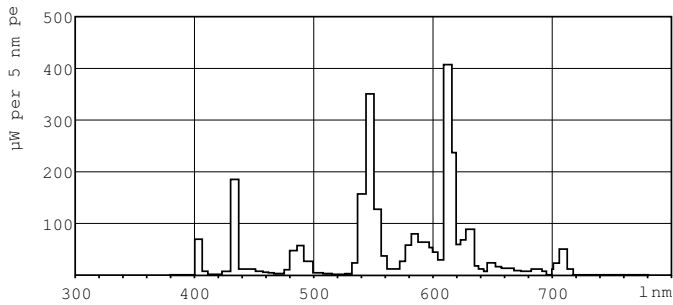


Lightcolour /830

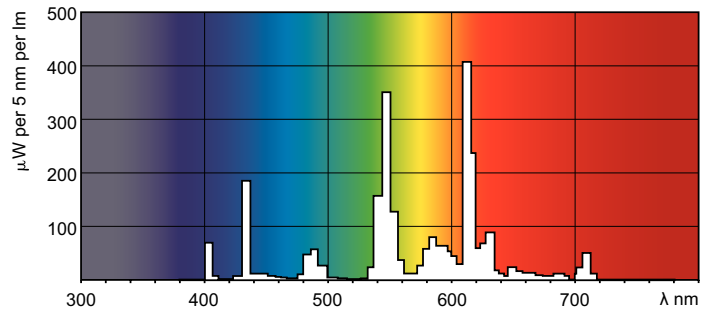

Lightcolour /830


Lifetime

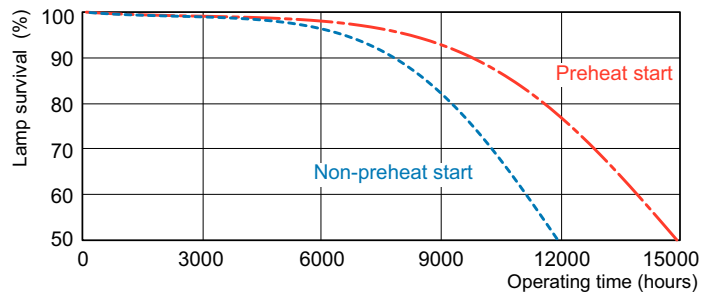

LDLE_PLT4PN_0002-Life expectancy diagram

MASTER PL-T 4 Pin

Lifetime

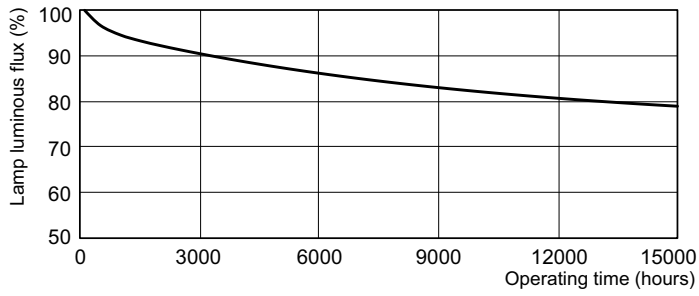

LDLM_PLT4PN_0001-Lumen maintenance diagram

