



# MASTER PL-L 4 Pin

## MASTER PL-L 55W/840/4P 1CT/25

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 2 parallel fluorescent tubes

### Product data

General Information	
Cap-Base	2G11 [ 2G11]
Life to 50% Failures Preheat (Nom)	20000 h
System Description	High Frequency [ High Frequency (HF)]
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	98 %
LSF Preheat 8000 h Rated	97 %
LSF Preheat 16000 h Rated	82 %
LSF Preheat 20000 h Rated	50 %
Light Technical	
Colour Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	4800 lm
Luminous Flux (Rated) (Nom)	4800 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	87 lm/W
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	95 %
LLMF 4000 h Rated	94 %
Depreciation 5000 hrs	93 %
LLMF 8000 h Rated	92 %
LLMF 12000 h Rated	91 %
LLMF 16000 h Rated	90 %

LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Rated) (Nom)	55.0 W
Lamp Current (Nom)	0.525 A
Temperature	
Design Temperature (Nom)	30 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	61 kWh
Product Data	
Full product code	871150061542840
Order product name	MASTER PL-L 55W/840/4P 1CT/25
EAN/UPC - Product	8711500615428
Order code	61542840


# MASTER PL-L 4 Pin

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927908708470
Net Weight (Piece)	134.000 g

ILCOS Code	FSDH-55/40/1B-L/P-2G11
------------	------------------------

## Warnings and Safety


## Dimensional drawing



PL-L 55W/840/4P HF

Product	MASTER PL-L 55W/840/4P 1CT/25
---------	-------------------------------

## Photometric data

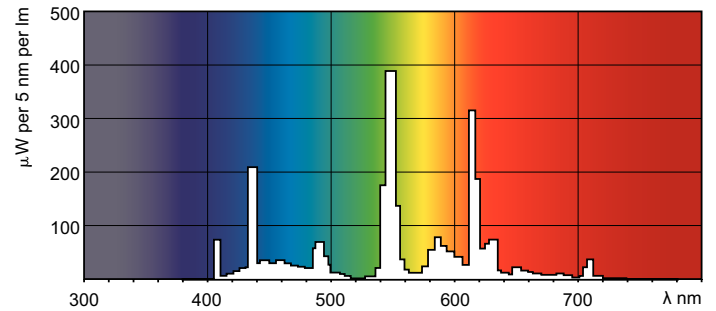

Lightcolour /840

Lightcolour /840

