



# **TUV T8**

# **TUV 55W HO 1SL/6**

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

# **Product data**


General Information				
Cap base	G13 [ Medium Bi-Pin Fluorescent]			
Main application	Disinfection			
Useful life (nom.)	9000 h			
System description	High Output (HO)			
Light Technical				
Colour code	TUV			
Colour designation	- [ Not Specified]			
Depreciation at Useful Lifetime	10 %			
Operating and Electrical				
Power (Rated) (Nom)	54 W			
Lamp current (nom.)	0.77 A			
Voltage (Nom)	86 V			
Approval and Application				
Mercury (Hg) content (nom.)	2.0 mg			

17.5 W		
871150061866510		
TUV 55W HO 1SL/6		
8711500618665		
61866510		
55TUVHO		
1		
6		
928049504003		
134.900 g		

#### **Warnings and Safety**

Datasheet, 2019, October 8 data subject to change


# Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 55W HO 1SL/6	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

#### TUV TL-D 55W HO

# Photometric data



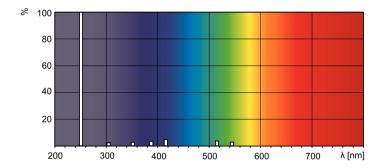

XDPB\_XUTUVTLD-Spectral power distribution B/W

XDPO\_XUTUVTLD-Spectral power distribution Colour

