



MASTER TL-D Super 80

MASTER TL-D Super 80 18W/865 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	12000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %
Light Technical	
Colour code	865 [CCT of 6,500 K]
Luminous flux (nom.)	1300 lm
Luminous flux (rated) (nom.)	1300 lm
Colour designation	Cool Daylight
Correlated colour temperature (nom.)	6500 K
Luminous efficacy (rated) (nom.)	68 lm/W
Color rendering index (nom.)	85
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %

LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical

Power (Rated) (Nom)	18.0 W
Lamp current (nom.)	0.360 A

Temperature

Design temperature (nom.)	25 °C
---------------------------	-------

Controls and Dimming

Dimmable	yes
----------	-----

Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy Consumption kWh/1000 h	22 kWh

Product Data

Full product code	871150063177040
-------------------	-----------------


MASTER TL-D Super 80

Order product name	MASTER TL-D Super 80 18W/865 1SL/25
EAN/UPC – product	8711500631770
Order code	63177040
Local Code	18865
Numerator – quantity per pack	1
Numerator – packs per outer box	25

Material no. (12NC)	927920086544
Net weight (piece)	71.000 g
ILCOS Code	FD-18/65/1B-E-G13

Warnings and Safety


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D 18W/865

Photometric data

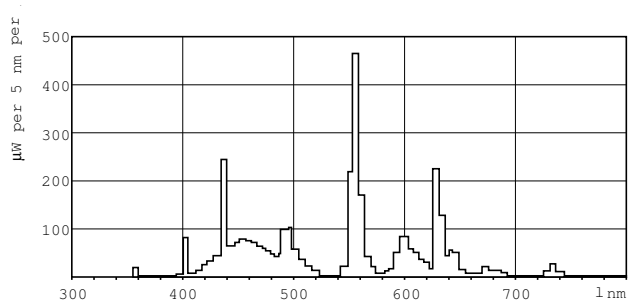

Lightcolour /865

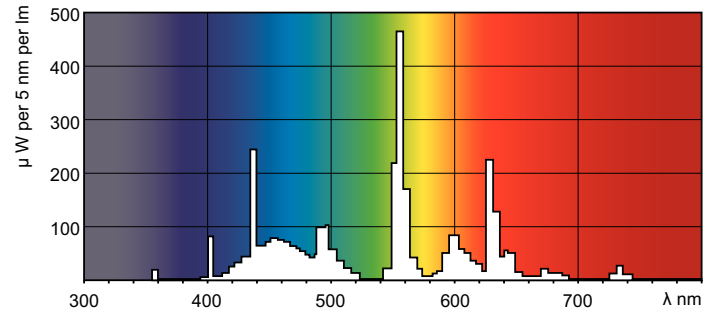

Lightcolour /865

MASTER TL-D Super 80

Lifetime



LDLE_TL-D8_0001-Life expectancy diagram

