



MASTER TL5 High Efficiency

MASTER TL5 HE 21W/830 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

General Information

ocherat illiornation			
Cap base	G5 [G5]		
Life to 50% failures preheat (nom.)	24000 h		
Features	na [Not Applicable]		
System description	High Efficiency		
LSF Preheat 2000 h Rated	99 %		
LSF Preheat 4000 h Rated	99 %		
LSF Preheat 6000 h Rated	99 %		
LSF Preheat 8000 h Rated	99 %		
LSF Preheat 16000 h Rated	97 %		
LSF Preheat 20000 h Rated	84 %		
Light Technical			
Colour code	830 [CCT of 3,000 K]		
Luminous flux (nom.)	2100 lm		
Luminous flux (rated) (nom.)	1850 lm		
Colour designation	Warm white (WW)		
Luminous efficacy (@ max. lumen, rated) (nom.)	101 lm/W		
Correlated colour temperature (nom.)	3000 K		
Luminous efficacy (rated) (nom.)	90 lm/W		
Color rendering index (max.)	85		
Color rendering index (min.)	80		
Color rendering index (nom.)	>80		

LLMF 2000 h Rated	96 %		
LLMF 4000 h Rated	95 %		
LLMF 6000 h Rated	94 %		
LLMF 8000 h Rated	93 %		
LLMF 12000 h Rated	92 %		
LLMF 16000 h Rated	91 %		
LLMF 20000 h Rated	90 %		
Operating and Electrical			
Power (Rated) (Nom)	20.6 W		
Lamp current (nom.)	0.165 A		
Temperature			
Design temperature (nom.)	35 ℃		
Controls and Dimming			
Dimmable	yes		
Mechanical and Housing			
Cap base information	Green Plate		
Approval and Application	<u> </u>		
Energy efficiency label (EEL)	A+		

Datasheet, 2020, March 19 data subject to change

MASTER TL5 High Efficiency

Mercury (Hg) content (nom.)	1.4 mg		
Energy Consumption kWh/1000 h	23 kWh		
Product Data			
Full product code	871150063942455		
Order product name	MASTER TL5 HE 21W/830 SLV/40		
EAN/UPC – product	8711500639424		
Order code	63942455		

Local Code	21830		
Numerator – quantity per pack	1		
Numerator – packs per outer box	40		
Material no. (12NC)	927926283055		
Net weight (piece)	79.200 g		
ILCOS Code	FDH-21/30/1B-L/P-G5-16/850		

Warnings and Safety


Dimensional drawing


L

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 21W/830	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
SLV/40					

TL5 21W/830/GP HE

Photometric data

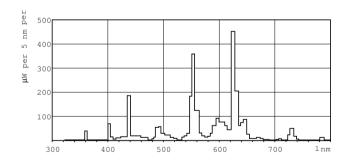

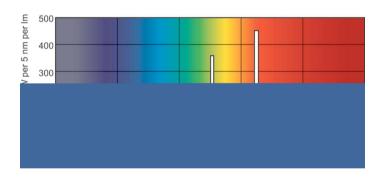



Lightcolour /830

Lightcolour /830

MASTER TL5 High Efficiency

Lifetime

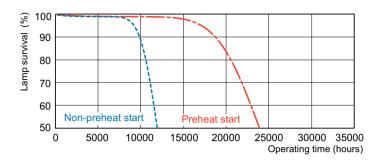

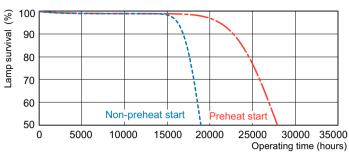

LDLE_TL5-HE8_0002-Life expectancy diagram



