



MASTER TL-D Secura

MASTER TL-D Secura 58W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux (Nom)	5000 lm
Luminous Flux (Rated) (Nom)	5000 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	85.5 lm/W
Colour Rendering Index horiz (Nom)	85
Depreciation 2000 hrs	96 %
LLMF 4000 h Rated	95 %
Depreciation 5000 hrs	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %

LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	58.5 W
Lamp Current (Nom)	0.670 A

Temperature	
Design Temperature (Nom)	25 °C

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	68 kWh

UV	
Damage Factor D/fc (Nom)	0.13

Product Data	
Full product code	871150064018540
Order product name	MASTER TL-D Secura 58W/840 SLV/25
EAN/UPC - Product	8711500640185
Order code	64018540


MASTER TL-D Secura

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927922484076
Net Weight (Piece)	243.100 g

ILCOS Code	FD-58/40/1B-E-G13
------------	-------------------

Warnings and Safety



Dimensional drawing



Product	MASTER TL-D Secura 58W/840 SLV/25
---------	-----------------------------------

TL-D 58W/840 Secura



Photometric data

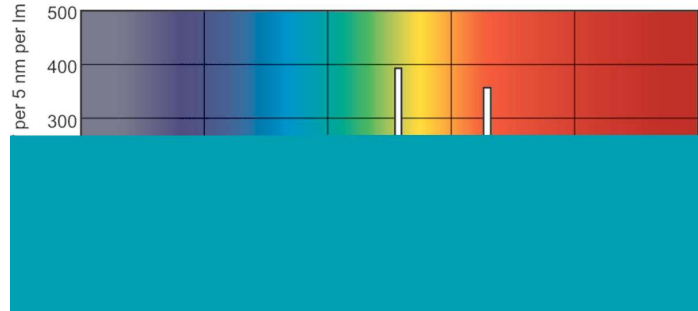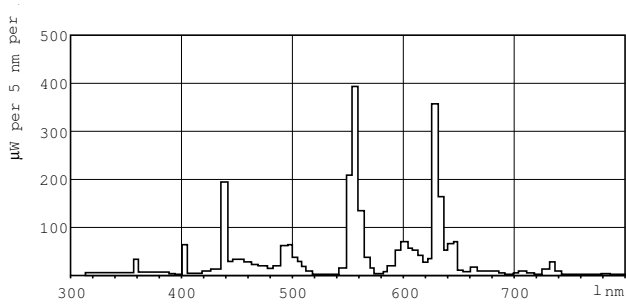

Lightcolour Secura /840

Lightcolour Secura /840


Lifetime

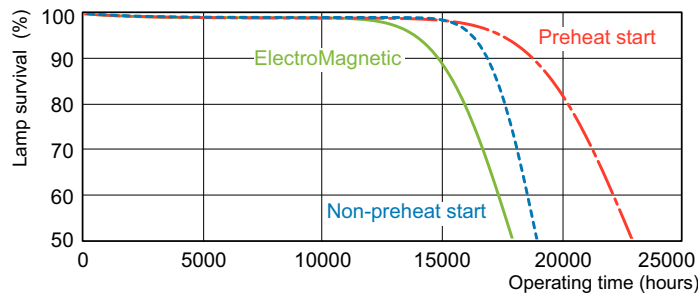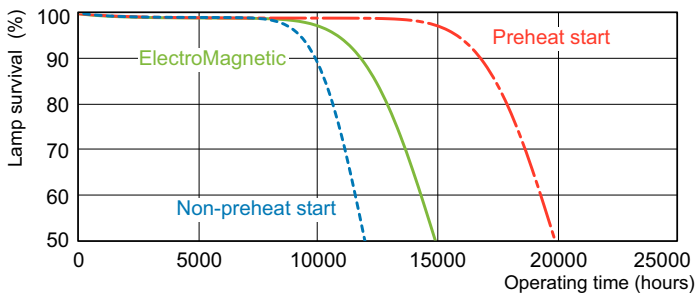

LDLE_TL-D8SE_0002-Life expectancy diagram

MASTER TL-D Secura

Lifetime

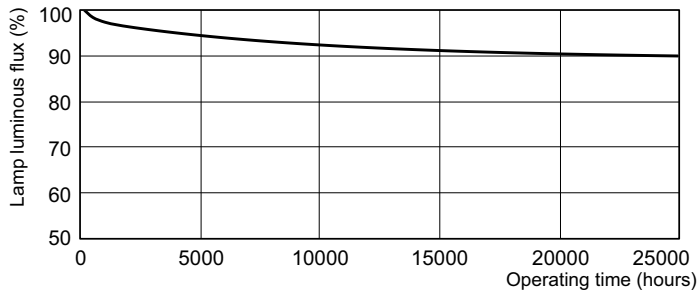

LDLM_TL-D8SE_0001-Lumen maintenance diagram

