



MASTER TL5 High Output

MASTER TL5 HO 54W/827 SLV/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Product data

General Information		
Cap-Base	G5 [G5]	
Life to 50% Failures Preheat (Nom)	30000 h	
Features	ALTO® (ALTO)	
System Description	High Output	
LSF Preheat 2000 h Rated	99 %	
LSF Preheat 4000 h Rated	99 %	
LSF Preheat 6000 h Rated	99 %	
LSF Preheat 8000 h Rated	99 %	
LSF Preheat 16000 h Rated	97 %	
LSF Preheat 20000 h Rated	84 %	
Color Rendering Index (Max)		85
Color Rendering Index (Min)		80
Color Rendering Index (Nom)		85
LLMF 2000 h Rated		96 %
LLMF 4000 h Rated		95 %
LLMF 6000 h Rated		94 %
LLMF 8000 h Rated		93 %
LLMF 12000 h Rated		92 %
LLMF 16000 h Rated		91 %
LLMF 20000 h Rated		90 %
Light Technical		
Color Code	827 [CCT of 2700K]	
Luminous Flux (Nom)	5000 lm	
Luminous Flux (Rated) (Nom)	4500 lm	
Color Designation	Incandescent White	
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	93 lm/W	
Correlated Color Temperature (Nom)	2700 K	
Luminous Efficacy (rated) (Nom)	83 lm/W	
Operating and Electrical		
Power (Rated) (Nom)	54.1 W	
Lamp Current (Nom)	0.455 A	
Temperature		
Design Temperature (Nom)	35 °C	

MASTER TL5 High Output

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Cap-Base Information	Green Plate
----------------------	-------------

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	59 kWh

Product Data


Full product code	871150064314855
-------------------	-----------------

Order product name	MASTER TL5 HO 54W/827 SLV/40
EAN/UPC - Product	8711500643148
Order code	927929082755
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927929082755
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-54/27/1B-L/P-G5-16/1150

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing

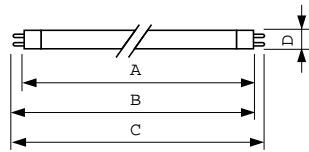

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/827 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HO 54W/827

Photometric data

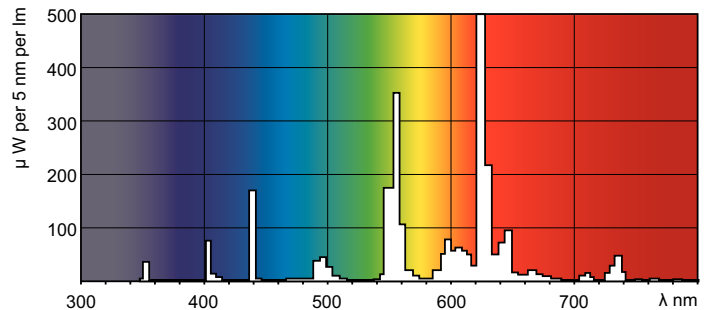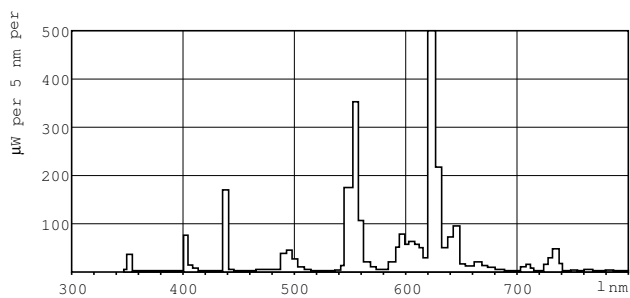

Lightcolor /827

Lightcolor /827

MASTER TL5 High Output

Lifetime



MASTER TL5 HO/ActiViva Life Expectancy 3 h cycle

MASTER TL5 HO/ActiViva Life Expectancy 12 h cycle



MASTER TL5 HO/ActiViva Lumen Maintenance 3 h + 12 h cycle

