



MASTER TL Mini Super 80

MASTER TL Mini Super 80 13W/827 1FM/10X25CC

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

General Information	
Cap-Base	G5 [G5]
Life To 10% Failures (Nom)	4000 h
Life to 50% Failures (Nom)	8000 h
Life to 50% Failures Preheat (Nom)	8000 h

Light Technical	
Colour Code	827 [CCT of 2700K]
Luminous Flux (Nom)	1000 lm
Colour Designation	Incandescent White
Lumen Maintenance 10000 h (Nom)	71 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	77 %
Colour Temperature, horizontal (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Colour Rendering Index horiz (Nom)	82

Operating and Electrical	
Power (Rated) (Nom)	13.0 W
Lamp Current (Nom)	0.170 A
Voltage (Nom)	90 V

Controls and Dimming	
Dimmable	Yes


Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	14 kWh

Product Data	
Full product code	871150070476427
Order product name	MASTER TL Mini Super 80 13W/827 FAM/ 10X25BOX
EAN/UPC - Product	8711500704764
Order code	70476427
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928001508250
Net Weight (Piece)	40.200 g
ILCOS Code	FD-13/27/1B-E-G5

Warnings and Safety

MASTER TL Mini Super 80

Dimensional drawing





Product

MASTER TL Mini Super 80 13W/827 FAM/10X25BOX

TL 13W/827

Photometric data

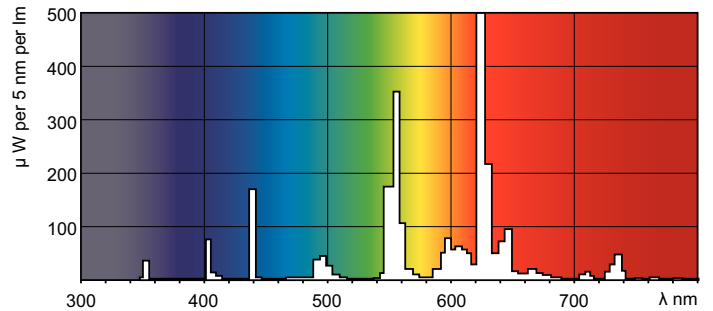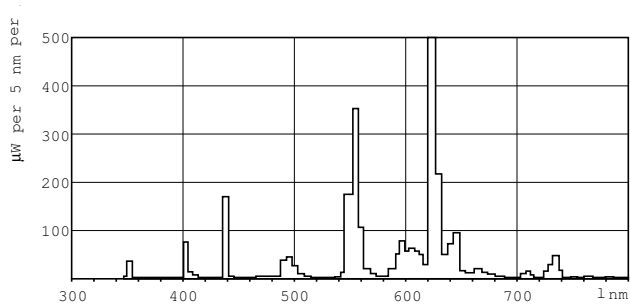

Lightcolour /827

Lightcolour /827

