



# MASTER TL Mini Super 80

## MASTER TL Mini Super 80 8W/840 1FM/10X25CC

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Product data

General Information	
Cap-Base	G5 [ G5]
Life To 10% Failures (Nom)	5000 h
Life to 50% Failures (Nom)	10000 h
Life to 50% Failures Preheat (Nom)	10000 h

Light Technical	
Colour Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	470 lm
Colour Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	71 %
Lumen Maintenance 2000 h (Nom)	85 %
Lumen Maintenance 5000 h (Nom)	77 %
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	59 lm/W
Colour Rendering Index horiz (Nom)	85

Operating and Electrical	
Power (Rated) (Nom)	7.1 W
Lamp Current (Nom)	0.145 A
Voltage (Nom)	56 V

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	8 kWh


  

Product Data	
Full product code	871150071642227
Order product name	MASTER TL Mini Super 80 8W/840 FAM/ 10X25BOX
EAN/UPC - Product	8711500716422
Order code	71642227
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928001008450
Net Weight (Piece)	22.210 g
ILCOS Code	FD-8/40/1B-E-G5

### Warnings and Safety

# MASTER TL Mini Super 80

## Dimensional drawing





### Product

MASTER TL Mini Super 80 8W/840 FAM/10X25BOX

TL 8W/840

## Photometric data

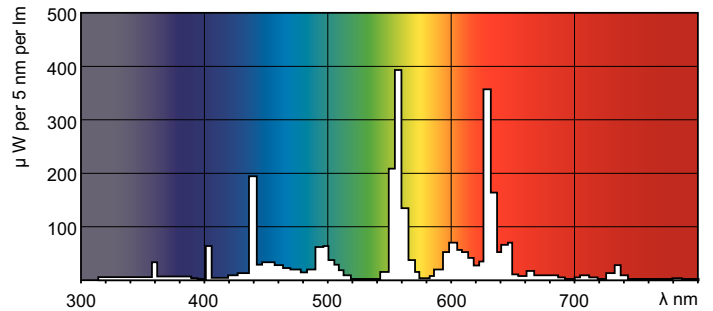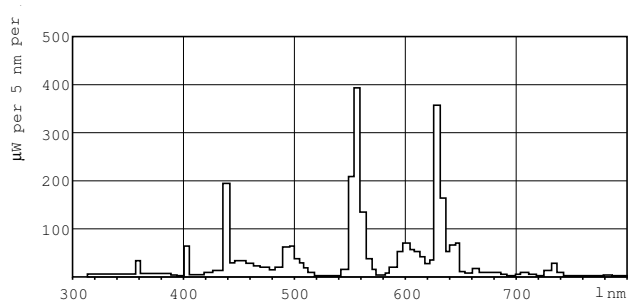

Lightcolour /840

Lightcolour /840

