



MASTER TL Mini Super 80

MASTER TL Mini Super 80 13W/830 1FM/10X25CC

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

General Information	
Cap base	G5 [G5]
Life to 10% failures (nom.)	4000 h
Life to 50% failures (nom.)	8000 h
Life to 50% failures preheat (nom.)	8000 h

Light Technical	
Colour code	830 [CCT of 3,000 K]
Luminous flux (nom.)	1000 lm
Colour designation	Warm white (WW)
Lumen maintenance 10,000 hours (nom.)	71 %
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	77 %
Correlated colour temperature (nom.)	3000 K
Luminous efficacy (rated) (nom.)	77 lm/W
Color rendering index (nom.)	85

Operating and Electrical	
Power (Rated) (Nom)	13.0 W
Lamp current (nom.)	0.170 A
Voltage (Nom)	90 V

Controls and Dimming	
Dimmable	yes


Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	3.0 mg
Energy Consumption kWh/1000 h	14 kWh

Product Data	
Full product code	871150071681127
Order product name	MASTER TL Mini Super 80 13W/830 FAM/10X25BOX
EAN/UPC – product	8711500716811
Order code	71681127
Local Code	13830
Numerator – quantity per pack	1
Numerator – packs per outer box	250
Material no. (12NC)	928001508350
Net weight (piece)	40.200 g
ILCOS Code	FD-13/30/1B-E-G5

Warnings and Safety

MASTER TL Mini Super 80

Dimensional drawing




Product

MASTER TL Mini Super 80 13W/830 FAM/10X25BOX

TL 13W/830

Photometric data

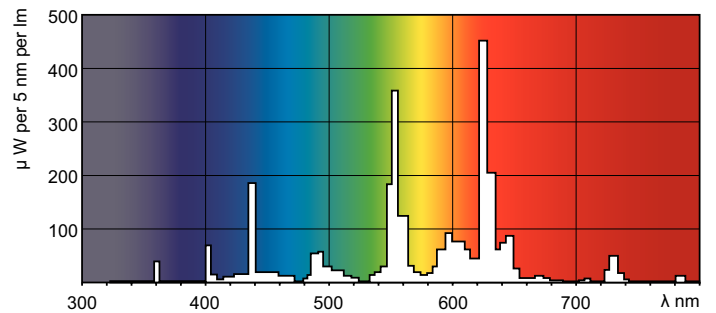

Lightcolour /830

Lightcolour /830

