



MASTER TL-D 90 De Luxe

MASTER TL-D 90 De Luxe 58W/940 1SL/10

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	12000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical	
Colour code	940 [CCT of 4,000 K]
Luminous flux (nom.)	4600 lm
Luminous flux (rated) (nom.)	4600 lm
Colour designation	Cool White (CW)
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (nom.)	78.6 lm/W
Color rendering index (nom.)	91

LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	58.5 W
Lamp current (nom.)	0.670 A

Temperature	
Design temperature (nom.)	25 °C

Controls and Dimming	
Dimmable	yes

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2 mg
Energy Consumption kWh/1000 h	68 kWh

MASTER TL-D 90 De Luxe

Product Data


Full product code	871150088869325
Order product name	MASTER TL-D 90 De Luxe 58W/940 SLV/10
EAN/UPC – product	8711500888693
Order code	88869325
Local Code	58940DLP
Numerator – quantity per pack	1

Numerator – packs per outer box	10
Material no. (12NC)	928045094081
Net weight (piece)	167.000 g
ILCOS Code	FD-58/38/1A-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90 De Luxe 58W/940 SLV/10	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

TL-D De Luxe 58W/940

Photometric data

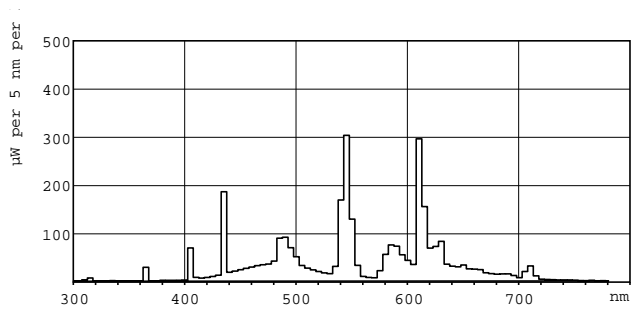

Lightcolour TL-D de Luxe /940

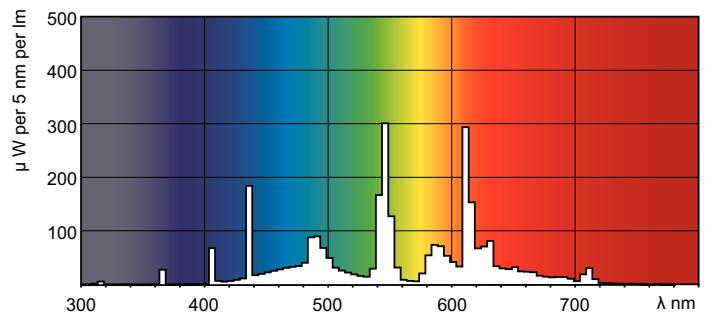

Lightcolour TL-D de Luxe /940

MASTER TL-D 90 De Luxe

Lifetime

