



MASTERColour CDM-R Elite

MASTERColour CDM-R Elite 70W/930 E27 PAR30L 30D

Compact, very high-efficiency, long-life Ceramic Metal Halide discharge reflector lamp producing crisp white sparkling light with high color rendering

Product data

General Information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	6500 h
Life to 20% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Switching Cycle	1350X

Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	30 °
Beam Angle Technical (Nom)	30 °
Luminous Intensity (Nom)	14000 cd
Beam Description	Flood
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	82 %
Lumen Maintenance 2000 h (Nom)	94 %
Lumen Maintenance 4000 h (Nom)	90 %
Design Mean Lumens	3800 lm
Chromaticity Coordinate X (Nom)	0.443

Chromaticity Coordinate Y (Nom)	0.402
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	70 lm/W
Color Rendering Index (Min)	89
Color Rendering Index (Nom)	92
LLMF At End Of Nominal Lifetime (Nom)	80 %
Luminous Flux in 90° Cone (Rated)	4500 lm

Operating and Electrical	
Power (Nom)	73.0 W
Re-Ignition Time (Min) (Max)	15 min
Warm Up Time to 60% Light (Nom)	120 s
Ignition Time (Max)	30 s
Voltage (Max)	93 V
Voltage (Min)	79 V
Voltage (Nom)	86 V

Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min

MASTERCLOUR CDM-R Elite

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	6.6 mg
Energy Consumption kWh/1000 h	80 kWh

Luminaire Design Requirements

Bulb Temperature (Max)	300 °C
Cap-Base Temperature (Max)	200 °C


Product Data

Full product code	871829124188100
-------------------	-----------------

Order product name	MASTERCLOUR CDM-R Elite 70W/930 E27 PAR30L 30D
EAN/UPC - Product	8718291241881
Order code	928109400630
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928109400630
Net Weight (Piece)	0.220 kg
ILCOS Code	MRS/UB-70/930-H-E27-95/125/30

Warnings and Safety


Dimensional drawing




CDM-R Elite 70W/930 E27 PAR30L 30D

Product	D (max)	C (max)
MASTERCLOUR CDM-R Elite 70W/930 E27 PAR30L 30D	97 mm	123 mm

Photometric data



LDLD_CDM-R-E_0004-Light distribution diagram

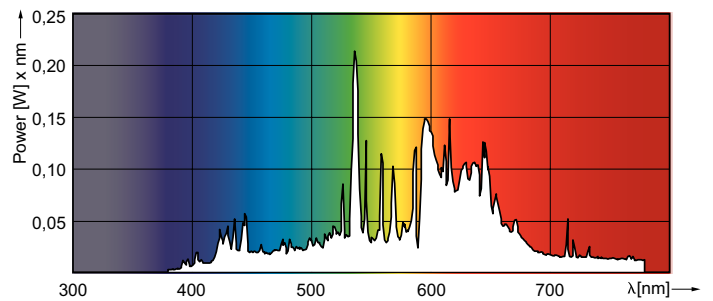

MASTERC colour CDM-R Elite

Lifetime



LDLE_CDM-R-E_930_PAR30L-Life expectancy diagram

