



# CorePro LEDtube EM/ Mains T8

## CorePro LEDtube 1200mm 18W865 C

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

### Product data

General Information			
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	Power (Rated) (Nom)	18 W
Main Application	Industrial	Lamp Current (Nom)	82 mA
Nominal Lifetime (Nom)	30000 h	Starting Time (Nom)	0.5 s
Switching Cycle	200000X	Warm Up Time to 60% Light (Nom)	instant full light s
B50L70	30000 h	Power Factor (Nom)	0.9
		Voltage (Nom)	220-240 V
Light Technical		Temperature	
Color Code	865 [ CCT of 6500K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	150 °	T-Ambient (Min)	-20 °C
Luminous Flux (Nom)	1600 lm	T-Storage (Max)	65 °C
Luminous Flux (Rated) (Nom)	1600 lm	T-Storage (Min)	-40 °C
Rated Beam Angle	150 °	T-Case Maximum (Nom)	53 °C
Correlated Color Temperature (Nom)	6500 K		
Color Consistency	<6	Controls and Dimming	
Color Rendering Index (Nom)	80	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Product Length	1200 mm

CorePro LEDtube EM/Mains T8


Approval and Application	
Energy Efficiency Label (EEL)	A+
Energy Saving Product	Yes
Suitable For Accent Lighting	No
Approval Marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	18 kWh
Product Data	
Full product code	871829166969200

Order product name	CorePro LEDtube 1200mm 18W865 C
EAN/UPC - Product	8718291669692
Order code	929000296732
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929000296732
Net Weight (Piece)	0.270 kg

Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


Dimensional drawing

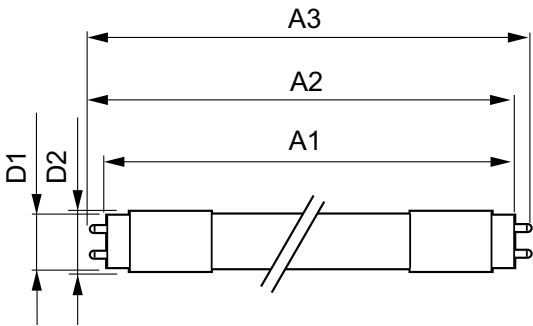


TLED 1200mm 18W865 C

Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 18W865 C	25.68 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm

Photometric data

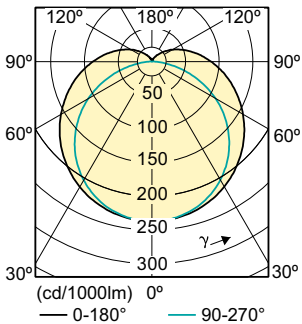

LEDtube 1200 mm 18 W C

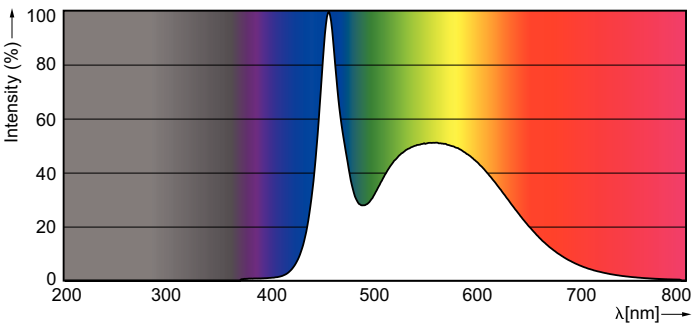

600 mm, 1200 mm 9 W, 18 W /865

## CorePro LEDtube EM/Mains T8

