

CorePro LEDlinear MV

CorePro LEDlinear ND 7.5-60W R7S 78mm840


CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. Within the range you can choose dimmable products which have deep dimming function that enables a cozy ambience when using a dimmable fixture.

Product data

General Information		Warm Up Time to 60% Light (Nom)	
Cap-Base	R7S [R7s]		0.5 s
EU RoHS compliant	Yes	Power Factor (Nom)	0.5
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V
Switching Cycle	50000X	Temperature	
Technical Type	7.5-60W	T-Case Maximum (Nom)	104 °C
Light Technical		Controls and Dimming	
Color Code	840 [CCT of 4000K]	Dimmable	No
Luminous Flux (Nom)	1000 lm	Approval and Application	
Color Designation	Cool White (CW)	Energy Efficiency Label (EEL)	A++
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	8 kWh
Luminous Efficacy (rated) (Nom)	133.33 lm/W	Product Data	
Color Consistency	<6	Full product code	871869671396900
Color Rendering Index (Nom)	80	Order product name	CorePro LEDlinear ND 7.5-60W R7S 78mm840
LLMF At End Of Nominal Lifetime (Nom)	70 %	EAN/UPC - Product	8718696713969
Operating and Electrical		Order code	929001339102
Input Frequency	50 to 60 Hz	Numerator - Quantity Per Pack	1
Power (Nom)	7.5 W	Numerator - Packs per outer box	10
Lamp Current (Nom)	70 mA	Material Nr. (12NC)	929001339102
Wattage Equivalent	60 W	Net Weight (Piece)	0.045 kg
Starting Time (Nom)	0.5 s		

CorePro LEDlinear MV


Dimensional drawing

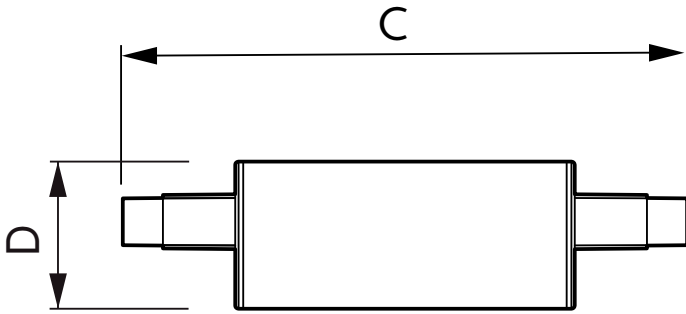


Product	D	C
CorePro LEDlinear ND 7.5-60W R7S 78mm840	29 mm	78 mm

Linear 220V 8-60W 806lm 4000K R7S ND


Photometric data



CorePro LEDlinear MV 60W R7S 840 Linear

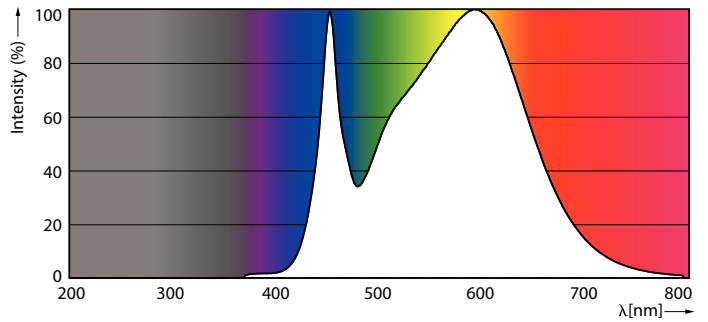

CorePro LEDlinear MV 60W R7S 840 Linear



CorePro LEDlinear MV 60W R7S 840 Linear

CorePro LEDlinear MV

Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

