



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL-DK 36W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

General Information			
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		
Main Application	Reprography (R)		
Life to 50% Failures (Nom)	9000 h		
Useful Life (Nom)	5000 h		
Light Technical			
Color Code	10		
Color Designation	Actinic		
Chromaticity Coordinate X (Nom)	225		
Chromaticity Coordinate Y (Nom)	230		
Operating and Electrical			
Power (Rated) (Nom)	36 W		
Lamp Current (Nom)	0.865 A		
Voltage (Nom)	50 V		

Approval and Application				
Mercury (Hg) Content (Nom)	8.0 mg			
UV				
UV-B/UV-A (IEC)	0.2 %			
UV-A Radiation 100Hr (IEC)	8.8 W			
Product Data				
Full product code	872790086083200			
Order product name	Actinic BL TL-DK 36W/10 1SL/25			
EAN/UPC - Product	8727900860832			
Order code	928019701003			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	25			
Material Nr. (12NC)	928019701003			
Net Weight (Piece)	68.900 g			


Datasheet, 2018, July 19 data subject to change

Actinic BL TL(-K) / TL-D(-K)

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-DK 36W/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
1SL/25					

TL-DK 36W/10

Photometric data



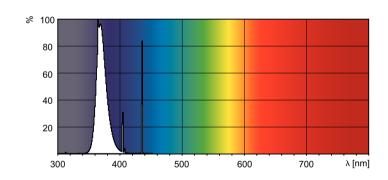

Lightcolor /10

Lightcolor /10

