

## Product information sheet

### LED R7s 28X118 DIM 12W (94W) 1400lm 827 360D

Bailey nr.: 142582


EAN-code: 8714681425824

#### Type of light source

Lighting technology used	LED
Cap type	R7s
Non-directional or directional	NDLS
Mains or non-mains	MLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	Yes

#### Specifications

Energy consumption in on-mode (KWh/1000h)	12
Energy Efficiency Class	E
Useful luminous flux (use) in lm	1400
Beam angle correspondence	Sphere (360°)
Correlated colour temperature (K)	2700
On-mode power (Pon) in W	12,0
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	118
Outer dimensions (Width) in mm	18
Outer dimensions (Depth) in mm	-
Claim of equivalent power	Yes
Equivalent power (W)	94
Chromaticity coordinate (x)	0,459
Chromaticity coordinate (y)	0,412
Peak luminous intensity (cd)	N/A
Beam angle (°)	360
R9 Colour rendering index	4
Survival factor	0,90
Lumen maintenance factor	0,93
Displacement factor	0,90
Colour consistency in McAdam ellipses	6
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	1,0
Stroboscopic effect metric	0,4
Lifetime L70B50 (h)	15000
Nominal voltage (V)	220-240
Voltage type	AC
Frequency	50/60

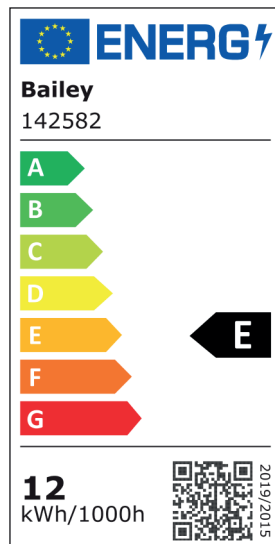

Specific precautions

N/A

Spectral power distribution

