

## Product information sheet

### LED Floodlight Slim II Sensor 30W 3000lm 3000K IP65

Bailey nr.: 142973


EAN-code: 8714681429730

#### Type of light source

|                                |                            |
|--------------------------------|----------------------------|
| Lighting technology used       | LED                        |
| Cap type                       | Cable 3x1.0mm <sup>2</sup> |
| Non-directional or directional | DLS                        |
| Mains or non-mains             | MLS                        |
| Connected light source (CLS)   | No                         |
| Colour-tuneable light source   | No                         |
| Envelope                       | No                         |
| High luminance light source    | No                         |
| Anti-glare shield              | No                         |
| Dimmable                       | No                         |

#### Specifications

|   |                  |
|---|------------------|
| Energy consumption in on-mode (KWh/1000h)   | 30               |
| Energy Efficiency Class                     | E                |
| Useful luminous flux (use) in lm            | 3000             |
| Beam angle correspondence                   | Wide cone (120°) |
| Correlated colour temperature (K)           | 3000             |
| On-mode power (Pon) in W                    | 30,0             |
| Standby power (Psb) in W                    | 0,50             |
| Networked standby power for CLS (Pnet) in W | -                |
| Colour rendering index                      | 70               |
| Outer dimension (Height) in mm              | 200              |
| Outer dimensions (Width) in mm              | 145              |
| Outer dimensions (Depth) in mm              | 40               |
| Claim of equivalent power                   | No               |
| Equivalent power (W)                        | -                |
| Chromaticity coordinate (x)                 | 0,427            |
| Chromaticity coordinate (y)                 | 0,395            |
| Peak luminous intensity (cd)                | 1135             |
| Beam angle (°)                              | 120              |
| R9 Colour rendering index                   | 0                |
| Survival factor                             | 0,90             |
| Lumen maintenance factor                    | 0,96             |
| Displacement factor                         | 0,95             |
| Colour consistency in McAdam ellipses       | 6                |
| Claim CFL-ni                                | No               |
| Replacement claim (W)                       | -                |
| Flicker metric                              | 0,9              |
| Stroboscopic effect metric                  | 3,2              |
| Lifetime L70B50 (h)                         | 35000            |
| Nominal voltage (V)                         | 220-240          |
| Voltage type                                | AC               |
| Frequency                                   | 50               |

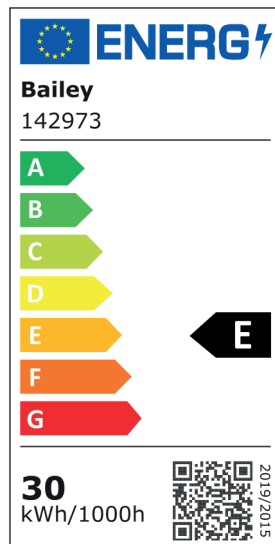

Specific precautions

Light source intended for use in outdoor applications

Spectral power distribution

