

## Product information sheet


### LED Floodlight Slim II Sensor 30W 3300lm 4000K IP65

Bailey nr.: 142974

EAN-code: 8714681429747

#### Type of light source

Lighting technology used	LED
Cap type	Cable 3x1.0mm <sup>2</sup>
Non-directional or directional	DLS
Mains or non-mains	MLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	No

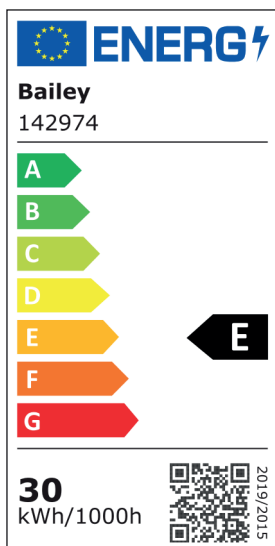

#### Specifications

Energy consumption in on-mode (KWh/1000h)	30
Energy Efficiency Class	E
Useful luminous flux (use) in lm	3300
Beam angle correspondence	Wide cone (120°)
Correlated colour temperature (K)	4000
On-mode power (Pon) in W	30,0
Standby power (Psb) in W	0,50
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	70
Outer dimension (Height) in mm	200
Outer dimensions (Width) in mm	145
Outer dimensions (Depth) in mm	40
Claim of equivalent power	No
Equivalent power (W)	-
Chromaticity coordinate (x)	0,375
Chromaticity coordinate (y)	0,373
Peak luminous intensity (cd)	1135
Beam angle (°)	120
R9 Colour rendering index	0
Survival factor	0,90
Lumen maintenance factor	0,96
Displacement factor	0,95
Colour consistency in McAdam ellipses	6
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	0,9
Stroboscopic effect metric	3,2
Lifetime L70B50 (h)	35000
Nominal voltage (V)	220-240
Voltage type	AC
Frequency	50

Specific precautions

Light source intended for use in outdoor applications

Spectral power distribution

