


Product information sheet

LED Floodlight Slim II Sensor 50W 5500lm 6500K IP65

Bailey nr.: 142978

EAN-code: 8714681429785

Type of light source	
Lighting technology used	LED
Cap type	Cable 3x1.0mm ²
Non-directional or directional	DLS
Mains or non-mains	MLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	No

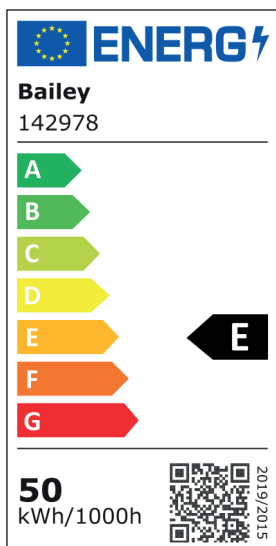

Specifications	
Energy consumption in on-mode (KWh/1000h)	50
Energy Efficiency Class	E
Useful luminous flux (use) in lm	5500
Beam angle correspondence	Wide cone (120°)
Correlated colour temperature (K)	6500
On-mode power (Pon) in W	50,0
Standby power (Psb) in W	0,50
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	70
Outer dimension (Height) in mm	242
Outer dimensions (Width) in mm	173
Outer dimensions (Depth) in mm	48
Claim of equivalent power	No
Equivalent power (W)	-
Chromaticity coordinate (x)	0,321
Chromaticity coordinate (y)	0,333
Peak luminous intensity (cd)	2075
Beam angle (°)	120
R9 Colour rendering index	0
Survival factor	0,90
Lumen maintenance factor	0,96
Displacement factor	0,95
Colour consistency in McAdam ellipses	6
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	0,9
Stroboscopic effect metric	3,2
Lifetime L70B50 (h)	35000
Nominal voltage (V)	220-240
Voltage type	AC
Frequency	50

Specific precautions

Light source intended for use in outdoor applications

Spectral power distribution

