

## Product information sheet


### LED Floodlight RGBWW 50W Remote Control

Bailey nr.: 143755

EAN-code: 8714681437551

#### Type of light source

Lighting technology used	LED
Cap type	Cable 3x0.75mm1
Non-directional or directional	DLS
Mains or non-mains	MLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	Yes

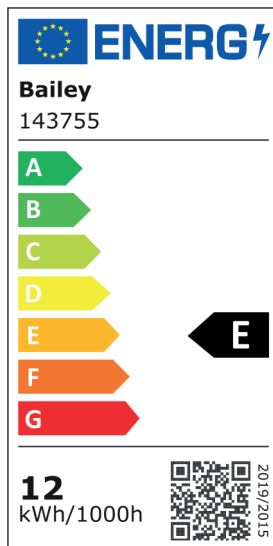

#### Specifications

Energy consumption in on-mode (KWh/1000h)	12
Energy Efficiency Class	E
Useful luminous flux (use) in lm	1080
Beam angle correspondence	Wide cone (120°)
Correlated colour temperature (K)	3000
On-mode power (Pon) in W	11,5
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	283
Outer dimensions (Width) in mm	231
Outer dimensions (Depth) in mm	59
Claim of equivalent power	No
Equivalent power (W)	-
Chromaticity coordinate (x)	0,440
Chromaticity coordinate (y)	0,400
Peak luminous intensity (cd)	650
Beam angle (°)	120
R9 Colour rendering index	63
Survival factor	0,90
Lumen maintenance factor	0,96
Displacement factor	0,70
Colour consistency in McAdam ellipses	6
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	1,0
Stroboscopic effect metric	0,4
Lifetime L70B50 (h)	20000
Nominal voltage (V)	100-260
Voltage type	AC
Frequency	50/60

Specific precautions

N/A

Spectral power distribution

