

## Product information sheet

### LED Spot MR16 GU5.3 24V-28V 7W (50W) 720lm 830 30D

Bailey nr.: 144346


EAN-code: 8714681443460

#### Type of light source

Lighting technology used	LED
Cap type	GU5.3
Non-directional or directional	DLS
Mains or non-mains	NMLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	No

#### Specifications

Energy consumption in on-mode (KWh/1000h)	7
Energy Efficiency Class	E
Useful luminous flux (use) in lm	720
Beam angle correspondence	Narrow cone (90°)
Correlated colour temperature (K)	3000
On-mode power (Pon) in W	7,0
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	50
Outer dimensions (Width) in mm	50
Outer dimensions (Depth) in mm	-
Claim of equivalent power	Yes
Equivalent power (W)	50
Chromaticity coordinate (x)	0,440
Chromaticity coordinate (y)	0,403
Peak luminous intensity (cd)	1850
Beam angle (°)	30
R9 Colour rendering index	0
Survival factor	0,90
Lumen maintenance factor	0,93
Displacement factor	N/A
Colour consistency in McAdam ellipses	N/A
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	N/A
Stroboscopic effect metric	N/A
Lifetime L70B50 (h)	15000
Nominal voltage (V)	24-28
Voltage type	AC/DC
Frequency	-

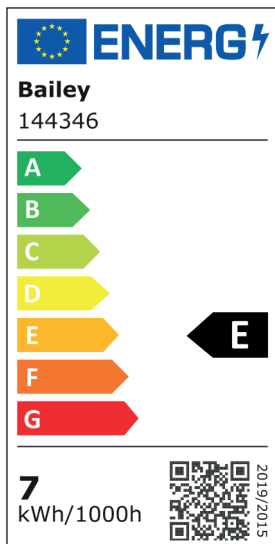

Specific precautions

N/A

Spectral power distribution

