

## Product information sheet

### LED Spot MR16 GU5.3 12V 5W (35W) 350lm 927 15D

Bailey nr.: 80100040697


EAN-code: 8714681406977

#### Type of light source

Lighting technology used	LED
Cap type	GU5.3
Non-directional or directional	DLS
Mains or non-mains	NMLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	No

#### Specifications

Energy consumption in on-mode (KWh/1000h)	5
Energy Efficiency Class	G
Useful luminous flux (use) in lm	350
Beam angle correspondence	Narrow cone (90°)
Correlated colour temperature (K)	2700
On-mode power (Pon) in W	5,0
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	90
Outer dimension (Height) in mm	50
Outer dimensions (Width) in mm	50
Outer dimensions (Depth) in mm	-
Claim of equivalent power	Yes
Equivalent power (W)	35
Chromaticity coordinate (x)	0,459
Chromaticity coordinate (y)	0,410
Peak luminous intensity (cd)	325
Beam angle (°)	15
R9 Colour rendering index	91
Survival factor	0,95
Lumen maintenance factor	0,96
Displacement factor	N/A
Colour consistency in McAdam ellipses	N/A
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	N/A
Stroboscopic effect metric	N/A
Lifetime L70B50 (h)	25000
Nominal voltage (V)	12
Voltage type	AC
Frequency	-

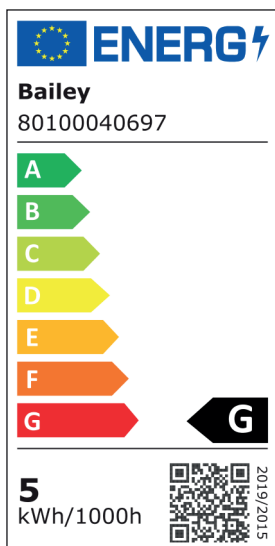

Specific precautions N/A

Spectral power distribution

