

## PTi 70/220...240 S

POWERTRONIC INTELLIGENT PTi S | ECG for HID lamps, for installation in luminaires



### Product family features

- Energy Efficiency Index EEI: A2
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- RI suppression: to EN 55015/CISPR 15
- Safety: to EN 61347-2-12
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

### Product family benefits

- Long reliable life at maximum permitted temperatures
- Compact dimensions and low weight for small luminaire designs
- Excellent thermal behavior for very high limit temperatures  $t_c$  and  $t_a$
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)

### Areas of application

- Shop lighting
- Health and fitness areas (in luminaires with protection class IP66 or higher)
- Effect and accent lighting

## Technical data

### Electrical data

Lamp wattage	73 W
Line current	0.36 A <sup>1)</sup>
Ignition voltage	4.5 kVp
Operating frequency	0.200...0.240 kHz
System wattage	79.00 W
ECG efficiency	92 %
Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor $\lambda$	0.95 <sup>2)</sup>
Inrush current	45 A <sup>3)</sup>
Max. ECG no. on circuit breaker 10 A (B)	7 <sup>4)</sup>
Max. ECG no. on circuit breaker 16 A (B)	13 <sup>4)</sup>
Max. no. of ECGs on 16A MCB with EBN-OS	32 <sup>4)</sup>
Protective conductor current	0.25 mA
U-OUT (working voltage)	250 V
Max. working voltage between LH and LL	250 V
Max. working voltage betw. LL/LH & earth	250 V
Max. capacitance of wire ECG/lamp	120 pF


1) At 230 V<sub>AC</sub>

2) Minimum

3)  $t_{width} = 250 \mu s$  (measured at 50 %  $I_{peak}$ )

4) Type B

### Dimensions & weight



Length	110.0 mm
Width	75.0 mm

## Product datasheet

Height	30.0 mm
Mounting hole spacing, length	99.0 mm
Mounting hole spacing, width	64.0 mm
Cable cross-section, input side	0.5...2.5 mm <sup>2</sup>
Cable cross-section, output side	0.5...2.5 mm <sup>2</sup>
Wire preparation length, input side	10...11 mm
Wire preparation length, output side	10...11 mm
Product weight	255.00 g

### Colors & materials

Casing material	Metal
-----------------	-------

### Temperatures & operating conditions

Ambient temperature range	-25...+55 °C
Maximum temperature at tc test point	85 °C

### Lifespan

ECG lifetime	50000 h <sup>1)</sup>
--------------	-----------------------

<sup>1)</sup> At maximum T<sub>c</sub> / 10% failure rate

### Additional product data

Design / version	Built-in unit
Suitable for lamp power (1 lamp)	73 W

### Capabilities

Max. cable length to lamp/LED module	1.5 m
Overheating protection	Power reduction and switch off at T > 85 °C at the tc point
Overvoltage protection at 275...300 V	48 h <sup>1)</sup>
Overvoltage protection at 300...320 V	2 h <sup>1)</sup>
Overvoltage protection at 320...350 V	5 min <sup>2)</sup>
ECG reset time	> 0.5 s
Dimmable	No
Restriction on ignition time	20 min
Suitable for fixtures with prot. class	I

<sup>1)</sup> Control gear switches off after 40 s

<sup>2)</sup> Control gear switches off or does not start

### Certificates & standards

Approval marks – approval	ENEC 10 / VDE / VDE-EMC / EAC / C-Tick
---------------------------	--


## Product datasheet

Type of protection	IP20
EEL – Energy Label	A2
Standards	Acc. to EN 61347-2-12/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61547

### Logistical data

Commodity code	850410809000
----------------	--------------

### Wiring Diagram

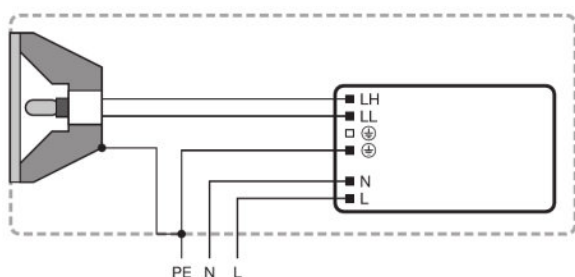

342165\_Setup for ECG Installation

### Safety advice

Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point of the ECG does not exceed the maximum value.

### Attention!

For safety reasons disconnect the device before replacing the lamp!













Any conductive material must have a minimum distance of 4 mm to the front of the terminal block.

Installation by qualified electrician only.

Terminals for protective earth not suitable for any through connection.

## Product datasheet

### Download Data

File	
	Addon Technical Information 47616_ADDON TECHNICAL INFORMATION POWERTRONIC PTi 70 S (GB)
	Tender documents 339884_Tender Document for POWERTRONIC EVG.eng
	Certificates 554891_EAC PT family
	Certificates VDE ENEC Certificate 40035813
	Declarations of conformity Powertronic UK DoC 4278196 260121
	Declarations of conformity Powertronic CE 3363432 120320
	Declarations of conformity VD EMC Certificate 40025469
	Operating instructions 590729_EAC - PTi S PT-FIT S
	CAD data 3-dim 313434_110x75x30 9900004
	CAD data 3-dim 313482_110x75x30 9900004
	CAD data 3-dim 313512_110x75x30 9900004
	CAD data PDF 313407_110x75x30 9900004

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321049629	PTi 70/220...240 S	Shipping carton box 20	412 mm x 136 mm x 194 mm	10.87 dm <sup>3</sup>	5169.89 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## PTi 70/220...240 S

POWERTRONIC INTELLIGENT PTi S | ECG for HID lamps, for installation in luminaires

Product name	Lamp group
PTi 70/220...240 S	HCI-E/P 70W
	HCI-ET 70W
	HCI-PAR30 70W
	HCI-T 70W
	HCI-TC 70W
	HCI-TS 70W
	HQI-TS 70W

---