
Product datasheet

HQI-BT 400 W/D PRO

POWERSTAR HQI-T | Metal halide lamps with quartz technology for enclosed luminaires



- Factories and workshops Sports halls and multi-purpose halls Industrial installations Docks and port facilities Marshaling yards, container transshipment facilities Buildings, monuments, bridges Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires

- Output of up to 400 W High efficiency Long lifetime E40 screw base for simple lamp handling UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter



Technical data

Electrical data

Nominal wattage	400.00 W
Rated wattage	420.00 W
Lamp current	4.0 A
PFC capacitor at 50 Hz	45 μ F ¹⁾
Nominal voltage	115 V
Ignition voltage	4.0 kVp;5.0 kVp ²⁾
Nominal current	4 A


¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

²⁾ Minimum;Maximum

Photometrical data

Rated lamp efficacy (standard condition)	81 lm/W
Rated luminous flux	34000 lm
Color rendering index Ra	92
Color temperature	5500 K
Light color	955
Rated LLMF at 2,000 h	0.92
Rated LLMF at 4,000 h	0.90
Rated LLMF at 6,000 h	0.87
Rated LLMF at 8,000 h	0.85
Rated LLMF at 12,000 h	0.81
UV protection	Yes
Nominal luminous flux	34000 lm
Rated color temperature	5500 K
Luminous flux	34000 lm

Dimensions & weight



Diameter	62.0 mm
Length	285.0 mm
Light center length (LCL)	175.0 mm
Product weight	200.00 g
Outer bulb	BT62
Overall length	285.0 mm

Temperatures & operating conditions

Maximum permitted outer bulb temperature	500 °C
Maximum permitted base edge temperature	250 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.96
Rated lamp survival factor at 4,000 h	0.94
Rated lamp survival factor at 6,000 h	0.93
Rated lamp survival factor at 8,000 h	0.88
Rated lamp survival factor at 12,000 h	0.81
Lifespan B50	16000 h

Additional product data

Base (standard designation)	E40
Product remark	With NAV control gear
Design / version	clear
Mercury content	59.0 mg
Appropriate disposal acc. to WEEE	Yes
Mercury-free	No

Product datasheet

Capabilities

Dimmable	No
Burning position	Any
Enclosed luminaire required	Yes


Certificates & standards

Energy efficiency class	A
Energy consumption	462 kWh/1000h

Country specific categorizations


ILCOS	MT/UB-400/960-H/E/SL-E40-62/285
Order reference	HQI-BT 400W/D P

Light Distribution

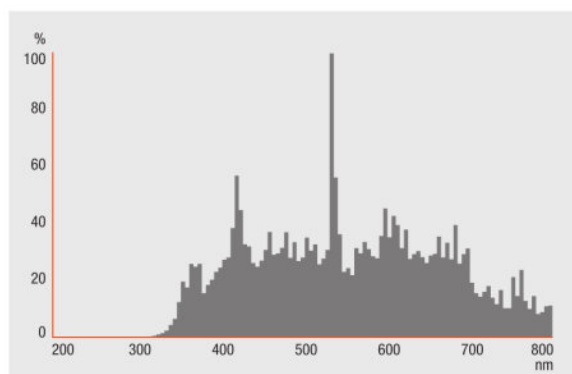


HQI_T_D_PRO


Product datasheet

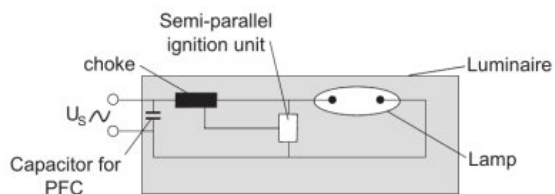

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

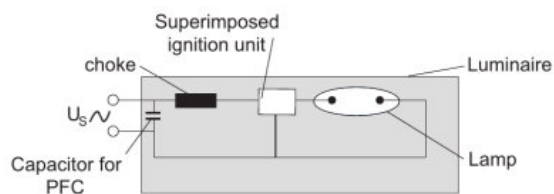

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

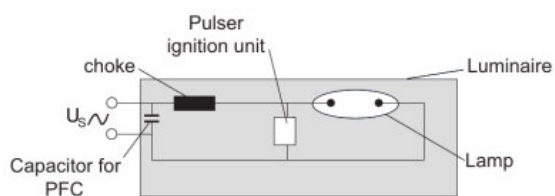

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321677860	HQI-BT 400 W/D PRO	Shipping carton box 12 Pieces Sleeves	342 mm x 347 mm x 258 mm	30.62 dm ³	3534.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany