

# Product datasheet

## HQI-T 2000 W/D/I

POWERSTAR HQI-T 1000...2000 W | Metal halide lamps for enclosed luminaires



- Factories and workshops Sports halls and multi-purpose halls Industrial installations Airports Docks and port facilities Marshaling yards, container transshipment facilities Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires

- Output of up to 2,000 W High efficiency E40 screw base for simple lamp handling Long lifetime UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter



## Product datasheet

### Technical data

#### Electrical data


Nominal wattage	2000.00 W
Rated wattage	2110.00 W
Lamp current	10.3 A
PFC capacitor at 50 Hz	60 $\mu$ F <sup>1)</sup>
Nominal voltage	230 V
Ignition voltage	0.23 kVp
Nominal current	10.3 A

<sup>1)</sup> At rated voltage and  $\cos \varphi \geq 0.9$

#### Photometrical data

Rated lamp efficacy (standard condition)	85 lm/W
Rated luminous flux	180000 lm
Color rendering index Ra	83
Color temperature	7450 K
Light color	875
Rated LLMF at 2,000 h	0.86
Rated LLMF at 4,000 h	0.75
Rated LLMF at 6,000 h	0.67
Rated LLMF at 8,000 h	0.60
UV protection	Yes
Nominal luminous flux	180000 lm
Rated color temperature	7450 K
Luminous flux	180000 lm

#### Dimensions & weight



Diameter	106.0 mm
----------	----------

## Product datasheet

Length	430.0 mm
Light center length (LCL)	265.0 mm
Product weight	544.80 g
Outer bulb	T106
Overall length	430.0 mm

### Temperatures & operating conditions

Maximum permitted outer bulb temperature	500 °C
Maximum permitted base edge temperature	250 °C

### Lifespan

Rated lamp survival factor at 2,000 h	0.97
Rated lamp survival factor at 4,000 h	0.89
Rated lamp survival factor at 6,000 h	0.75
Rated lamp survival factor at 8,000 h	0.58
Lifespan B50	9000 h

### Additional product data

Base (standard designation)	E40
Product remark	Operation without external igniter
Design / version	clear
Mercury content	170.0 mg
Appropriate disposal acc. to WEEE	Yes
Mercury-free	No

### Capabilities

Burning position	p30
Enclosed luminaire required	Yes
Dimmable	No

### Certificates & standards

Energy efficiency class	A
Energy consumption	2332 kWh/1000h


### Country specific categorizations

ILCOS	MT/UB-2000/972-E/I/SL-E40-106/430/H
Order reference	HQI-T 2000W/D/I

## Product datasheet

### Light Distribution

---

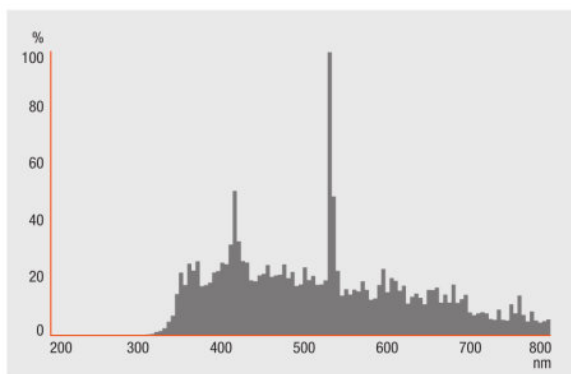

---

HQI\_T\_1000W\_2000W\_D

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321527011	HQI-T 2000 W/D/I	Shipping carton box 4 Pieces Round wrap	296 mm x 532 mm x 275 mm	43.30 dm <sup>3</sup>	3583.20 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany