
Product datasheet

NAV-E 70 W/I E27

VIALOX NAV-E/I | High-pressure sodium vapor lamps with internal igniter



- Streets Outdoor lighting Industrial installations
Suitable for use in open and enclosed luminaires Outdoor applications only in suitable luminaires

- High luminous efficacy



Product datasheet

Technical data


Electrical data

Nominal wattage	70.00 W
Rated wattage	70.00 W
Lamp current	0.98 A
Nominal voltage	90 V
Ignition voltage	0.198 kVp
Nominal current	0.98 A

Photometrical data

Rated lamp efficacy (standard condition)	84 lm/W
Rated luminous flux	5900 lm
Color rendering index Ra	≤25
Color temperature	2000 K
Rated LLMF at 2,000 h	0.92
Rated LLMF at 4,000 h	0.86
Rated LLMF at 6,000 h	0.83
Rated LLMF at 8,000 h	0.82
Rated LLMF at 12,000 h	0.81
Rated LLMF at 16,000 h	0.81
Rated LLMF at 20,000 h	0.80
Nominal luminous flux	5900 lm
Rated color temperature	2000 K
Luminous flux	5900 lm

Dimensions & weight

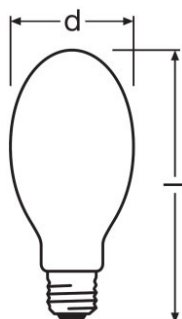

Diameter	71.0 mm
Length	156.0 mm

Product datasheet

Product weight	55.00 g
Outer bulb	E70
Overall length	156.0 mm

Temperatures & operating conditions

Maximum permitted outer bulb temperature	310 °C
Maximum permitted base edge temperature	210 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.98
Rated lamp survival factor at 4,000 h	0.97
Rated lamp survival factor at 6,000 h	0.97
Rated lamp survival factor at 8,000 h	0.60
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.85
Rated lamp survival factor at 20,000 h	0.70
Lifespan B50	24000 h
Lifespan B10	14000 h
Lifespan B5	12000 h
Operation mode LLMF/LSF	50 Hz

Additional product data

Base (standard designation)	E27
Product remark	Operate only with NAV control gear. No igniter required/ErP compliant according to EU Regulation 245/2009
Design / version	Coated
Mercury content	18.7 mg ¹⁾
Appropriate disposal acc. to WEEE	Yes
Mercury-free	No

¹⁾ Maximum

Capabilities

Dimmable	No
Burning position	Any
Enclosed luminaire required	No

Certificates & standards


Energy efficiency class	A
Energy consumption	77 kWh/1000h

Product datasheet

Country specific categorizations

ILCOS	SE-70-H/I/S-E27-71/156
Order reference	NAV-E 70W/I E27

Light Distribution

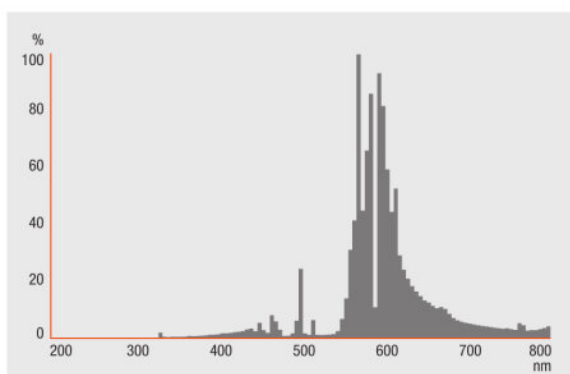

NAV_SUPER_4Y_SUPER_6Y

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300015590	NAV-E 70 W/I E27	Shipping carton box 24 Pieces Round wrap	360 mm x 355 mm x 283 mm	36.17 dm ³	2039.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany