

---

# Product datasheet

## NAV-T 1000 W E40

VIALOX NAV-T | High-pressure sodium vapor lamps for open and enclosed luminaires



## Product datasheet

### Technical data

#### Electrical data


Nominal wattage	1000.00 W
Rated wattage	960.00 W
Lamp current	10.6 A
Nominal voltage	110 V
Ignition voltage	3.6 kVp;5.0 kVp <sup>1)</sup>
Nominal current	10.3 A

<sup>1)</sup> Minimum;Maximum

#### Photometrical data

Rated lamp efficacy (standard condition)	135 lm/W
Rated luminous flux	130000 lm
Color rendering index Ra	≤25
Color temperature	2000 K
Rated LLMF at 2,000 h	0.96
Rated LLMF at 4,000 h	0.93
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.89
Rated LLMF at 12,000 h	0.84
Rated LLMF at 16,000 h	0.81
Rated LLMF at 20,000 h	0.78
Nominal luminous flux	130000 lm
Rated color temperature	2000 K
Luminous flux	130000 lm

#### Dimensions & weight

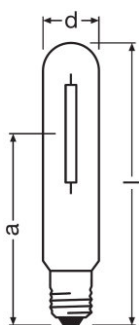

Diameter	66.0 mm
----------	---------

## Product datasheet

Length	360.0 mm
Light center length (LCL)	240.0 mm
Product weight	300.00 g
Outer bulb	T65
Overall length	360.0 mm

### Temperatures & operating conditions

Maximum permitted outer bulb temperature	400 °C
Maximum permitted base edge temperature	250 °C

### Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.98
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.95
Rated lamp survival factor at 12,000 h	0.87
Rated lamp survival factor at 16,000 h	0.74
Rated lamp survival factor at 20,000 h	0.50
Lifespan B50	20000 h
Lifespan B10	11000 h
Lifespan B5	8000 h

### Additional product data

Base (standard designation)	E40
Product remark	ErP compliant according to EU Regulation 245/2009
Design / version	clear
Mercury content	39.0 mg
Appropriate disposal acc. to WEEE	Yes
Mercury-free	No

### Capabilities

Dimmable	Yes
Burning position	Any
Enclosed luminaire required	No

### Certificates & standards


Energy efficiency class	A++
Energy consumption	1056 kWh/1000h

## Product datasheet

### Country specific categorizations

ILCOS	ST-1000-H/E/SL-E40-66/360
Order reference	NAV-T 1000W E40

### Light Distribution

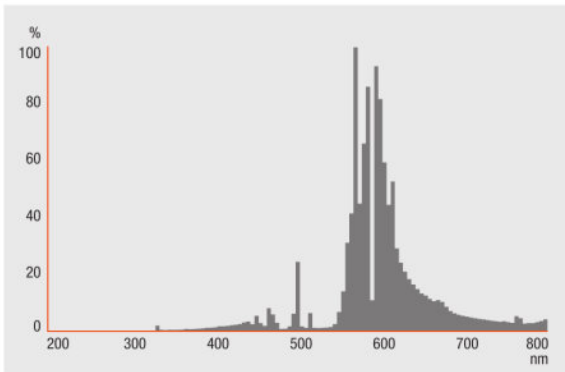

NAV\_SUPER\_4Y\_SUPER\_6Y

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300251417	NAV-T 1000 W E40	Shipping carton box 12 Pieces Sleeves	380 mm x 405 mm x 284 mm	43.71 dm <sup>3</sup>	4477.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany