
Product datasheet

DULUX D/E 10 W/827

OSRAM DULUX D/E | CFLni, 2 tubes, with 4-pin base for ECG operation



Product datasheet

Technical data


Electrical data

Nominal wattage	10.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated wattage	10.00 W

Photometrical data

Nominal luminous flux	600 lm
Light color (designation)	LUMILUX INTERNA
Luminous flux at	600 lm
Rated luminous flux	600 lm
Rated color temperature	2700 K
Rated LLMF at 2,000 h	0.90
Rated LLMF at 4,000 h	0.84
Rated LLMF at 6,000 h	0.83
Rated LLMF at 8,000 h	0.81
Rated LLMF at 12,000 h	0.79
Rated LLMF at 16,000 h	0.78
Rated LLMF at 20,000 h	0.77
Color rendering index Ra	≥80
Color temperature	2700 K
Luminous flux	600 lm
Color rendering index Ra	80...89

Dimensions & weight

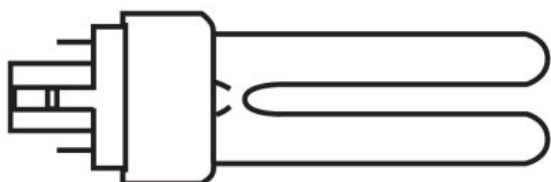

Diameter	12.0 mm
Overall length	101.0 mm

Product datasheet

Length	103.0 mm
Length acc. to IEC standard	95 mm
Length with base excl. base pins/connection	87.00 mm
Outer bulb	T11X2
Product weight	31.00 g
Maximum diameter	11.0 mm

Lifespan

Rated lamp life time	20000 h
Service life	13000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾
Nominal lamp life time	5000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G24q-1
Mercury content	1.3 mg
Appropriate disposal acc. to WEEE	Yes

Capabilities

Dimmable	Yes
Suitable for indoor	Yes


Certificates & standards

Energy efficiency class	A
Energy consumption	11 kWh/1000h

Country specific categorizations

ILCOS	FSQH-10/827-/P/-G24q-1
Order reference	DULUX D/E 10W/8


Light Distribution

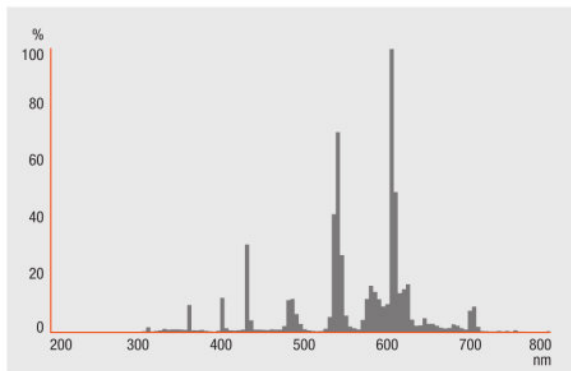


FL_827

Equipment / Accessories

- Suitable for operation on electronic control gear

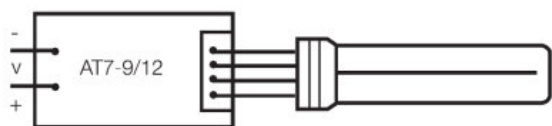


SINGLE LAMP WITH ACCUTRONIC AT

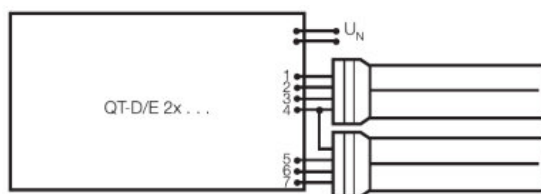

SERIES CONNECTION WITH QUICKTRONIC QT-DE

Product datasheet

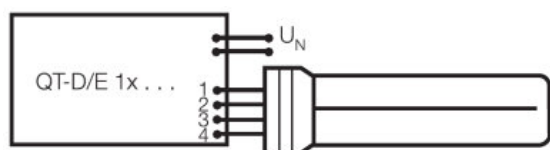

SINGLE LAMP WITH QUICKTRONIC QT-DE

SINGLE LAMP WITH PLUG-IN CONTROL GEAR

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300012124	DULUX D/E 10 W/827	Shipping carton box 10 Pieces Folding carton box	166 mm x 133 mm x 103 mm	2.27 dm ³	428.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX D/E 10 W/827

OSRAM DULUX D/E | CFLni, 2 tubes, with 4-pin base for ECG operation

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 25 °C
DULUX D/E 10 W/827	QT-ECO 1x4-16/220-240 S	4050300638584	0.08 A	11.50 W	0.60 c	600 lm
	QT-ECO 2x5-11/220-240 S	4050300821504	0.14 A	20.00 W	0.60 c	600 lm
	QTP-D/E 1x10-13	4008321181572	0.05 A	12.00 W	0.95	600 lm
	QTP-D/E 2x10-13	4008321181596	0.09 A	21.00 W	0.95	2*600 lm

Product name	Product name ECG	EAN	Number of lighting outlets	EEI – Energy Label
DULUX D/E 10 W/827	QT-ECO 1x4-16/220-240 S	4050300638584	1	A3
	QT-ECO 2x5-11/220-240 S	4050300821504	2	A2 BAT
	QTP-D/E 1x10-13	4008321181572	1	
	QTP-D/E 2x10-13	4008321181596	2	