
Product datasheet

DULUX T/E PLUS 42 W/830

OSRAM DULUX T/E PLUS | CFLni, 3 tubes, with 4-pin base for ECG operation



- Offices, public buildings Shops Supermarkets and department stores Hotels, restaurants Industrial lighting

- Extremely economical Good quality of light Excellent luminous flux Long service life Improved maintenance OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG



Product datasheet

Technical data


Electrical data

Nominal wattage	42.00 W
Nominal voltage	135 V
Rated lamp efficacy (HF data 25 °C)	74 lm/W
Rated wattage	43.00 W
Nominal current	0.32 A

Photometrical data

Nominal luminous flux	3200 lm
Light color (designation)	LUMILUX Warm White
Luminous flux at	3200 lm
Rated luminous flux	3200 lm
Rated color temperature	3000 K
Rated LLMF at 2,000 h	0.90
Rated LLMF at 4,000 h	0.84
Rated LLMF at 6,000 h	0.83
Rated LLMF at 8,000 h	0.81
Rated LLMF at 12,000 h	0.79
Rated LLMF at 16,000 h	0.78
Rated LLMF at 20,000 h	0.77
Color rendering index Ra	≥80
Color temperature	3000 K
Luminous flux	3200 lm
Color rendering index Ra	80...89

Dimensions & weight



Diameter	12.0 mm
----------	---------

Product datasheet

Overall length	167.0 mm
Length	169.0 mm
Length acc. to IEC standard	155 mm
Length with base excl. base pins/connection	153.00 mm
Outer bulb	T12
Product weight	81.00 g

Lifespan

Rated lamp life time	20000 h
Service life	13000 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾
Nominal lamp life time	20000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	GX24q-4
Mercury content	1.7 mg
Appropriate disposal acc. to WEEE	Yes
Product remark	For ECG operation only

Capabilities

Dimmable	Yes
----------	-----

Certificates & standards

Energy efficiency class	A
Energy consumption	48 kWh/1000h

Country specific categorizations

ILCOS	FSMH-42/830-/P/-GX24q-4
Order reference	DULUX T/E 42W/8


Light Distribution



FL_830

Equipment / Accessories

- Suitable for operation on electronic control gear

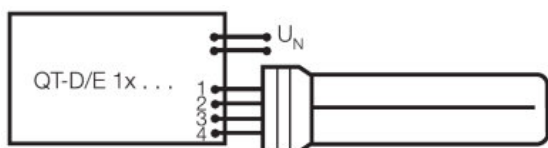

SINGLE LAMP WITH QUICKTRONIC QT-DE

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

Product datasheet

4050300425641	DULUX T/E PLUS 42 W/830	Shipping carton box 10 Pieces Folding carton box	218 mm x 191 mm x 140 mm	5.83 dm ³	999.00 g
---------------	----------------------------	--------------------------------------------------------	-----------------------------	----------------------	----------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX T/E PLUS 42 W/830

OSRAM DULUX T/E PLUS | CFLni, 3 tubes, with 4-pin base for ECG operation

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 25 °C
DULUX T/E PLUS 42 W/830	QTi DALI-T/E 1x18-57 DIM	4008321060808	0.21 A	47.00 W	0.99	3200 lm
	QTi DALI-T/E 2x18-42 DIM	4008321060822	0.39 A	90.00 W	0.99	3200 lm
	QTi-T/E 1x18-57 DIM	4008321060860	0.21 A	47.00 W	0.99	3200 lm
	QTi-T/E 2x18-42 DIM	4008321060846	0.39 A	90.00 W	0.99	3200 lm
	QT-M 2x26-42/220-240 S	4008321110022	0.39 A	92.00 W	0.97	3200 lm
	QTP-M 1x26-42	4008321329134	0.20 A	46.00 W	0.97	3200 lm
	QTP-M 2x26-32	4008321329158	0.20 A	46.00 W	0.97	3200 lm
	QTP-T/E 1x26-42, (2x26)	4008321537089	0.20 A	45.00 W	0.95	3200 lm

Product name	Product name ECG	EAN	Number of lighting outlets
DULUX T/E PLUS 42 W/830	QTi DALI-T/E 1x18-57 DIM	4008321060808	1
	QTi DALI-T/E 2x18-42 DIM	4008321060822	2
	QTi-T/E 1x18-57 DIM	4008321060860	1
	QTi-T/E 2x18-42 DIM	4008321060846	2
	QT-M 2x26-42/220-240 S	4008321110022	2
	QTP-M 1x26-42	4008321329134	1
	QTP-M 2x26-32	4008321329158	1

Product datasheet

Product name	Product name ECG	EAN	Number of lighting outlets
	QTP-T/E 1x26-42, (2x26)	4008321537089	1