

---

# Product datasheet

## FC 40 W/830

LUMILUX T5 FC | Circular fluorescent lamps 16 mm, with 2GX13 base

- Public buildings Offices Restaurants Industry Shops  
Supermarkets and department stores Hotels



- Extremely economical Good quality of light Excellent luminous flux Excellent uniform illumination with no shadows  
Good average life (with OSRAM ECG)



# Product datasheet

## Technical data

### Electrical data

Nominal wattage	40.00 W
Rated wattage	39.90 W

### Photometrical data

Rated lamp efficacy (standard condition)	84 lm/W
Color rendering index Ra	≥80
Rated luminous flux	3400 lm
Luminous flux at	3400 lm
Light color	830
Rated color temperature	3000 K
Nominal luminous flux	3400 lm
Light color (designation)	LUMILUX Warm White
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.83
Rated LLMF at 6,000 h	0.80
Rated LLMF at 8,000 h	0.80
Rated LLMF at 12,000 h	0.75
Color temperature	3000 K
Luminous flux	3400 lm

### Dimensions & weight



Tube diameter	16 mm
Length	305.0 mm
Length with base excl. base pins/connection	300.00 mm
Diameter	16.0 mm
Product weight	83.75 g

## Product datasheet

Outer bulb	T16
Maximum diameter	16.0 mm

### Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	35.0 °C
--	---------

### Lifespan

Service life	8000 h <sup>1)</sup>
Lifespan	12000 h <sup>1)</sup>
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.98
Rated lamp survival factor at 8,000 h	0.92
Rated lamp survival factor at 12,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	12000 h

<sup>1)</sup> With preheat ECG

### Additional product data

Base (standard designation)	2GX13
Mercury content	3.0 mg
Product remark	Suitable for ECG operation only
Appropriate disposal acc. to WEEE	Yes

### Capabilities

Suitable for indoor	Yes
---------------------	-----

### Certificates & standards


Energy efficiency class	A+
Energy consumption	44 kWh/1000h

### Country specific categorizations

Order reference	FC 40W/830
-----------------	------------

## Light Distribution

---

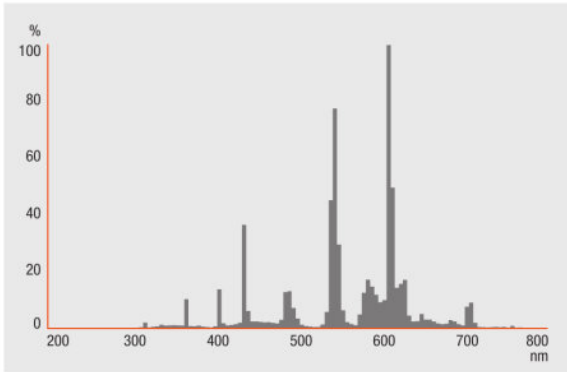

FL\_830

---


## System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs


---

## Equipment / Accessories

- Exclusively for operation on electronic control gears

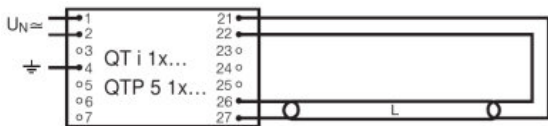

QUICKTRONIC INTELLIGENT QT i 1x QTP 5 1x

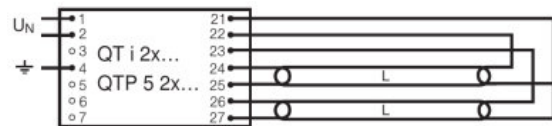

QUICKTRONIC INTELLIGENT QT i 2x QTP 5 2x

## Product datasheet

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300528540	FC 40 W/830	Shipping carton box 12 Pieces Folding carton box	375 mm x 320 mm x 328 mm	39.36 dm <sup>3</sup>	2787.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany

## FC 40 W/830

LUMILUX T5 FC | Circular fluorescent lamps 16 mm, with 2GX13 base

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor $\lambda$ [PIM]	Luminous flux at 35 °C
FC 40 W/830	QTi 1x14/24/21/39 GII	4008321383334	0.19 A	43.00 W	0.96	3200 lm
	QTi 1x21/39 DIM	4050300870564	0.18 A	42.00 W	0.98	3100 lm
	QTi 2x14/24/21/39 GII	4008321383396	0.36 A	88.00 W	0.99	3200 lm
	QTi 2x21/39 DIM	4050300870694	0.36 A	82.00 W	0.98	3100 lm
	QTi DALI 1x21/39 DIM	4050300870366	0.18 A	42.00 W	0.98	3100 lm
	QTi DALI 2x21/39 DIM	4050300870489	0.36 A	82.00 W	0.98	3100 lm
	QTi DALI-T/E 1x18-57 DIM	4008321060808	0.20 A	45.00 W	0.98	3200 lm
	QTi DALI-T/E 2x18-42 DIM	4008321060822	0.38 A	87.00 W	0.99	3200 lm
	QTi-T/E 1x18-57 DIM	4008321060860	0.20 A	45.00 W	0.98	3200 lm
	QTi-T/E 2x18-42 DIM	4008321060846	0.38 A	87.00 W	0.99	3200 lm
	QT-M 2x26-42/220-240 S	4008321110022	0.36 A	88.00 W	0.97	3200 lm
QTP-M 1x26-42	4008321329134	0.19 A	43.00 W	0.97	3200 lm	

Product name	Product name ECG	EAN	Number of lighting outlets
FC 40 W/830	QTi 1x14/24/21/39 GII	4008321383334	1
	QTi 1x21/39 DIM	4050300870564	1
	QTi 2x14/24/21/39 GII	4008321383396	2

## Product datasheet

Product name	Product name ECG	EAN	Number of lighting outlets
	QTi 2x21/39 DIM	4050300870694	2
	QTi DALI 1x21/39 DIM	4050300870366	1
	QTi DALI 2x21/39 DIM	4050300870489	2
	QTi DALI-T/E 1x18-57 DIM	4008321060808	1
	QTi DALI-T/E 2x18-42 DIM	4008321060822	2
	QTi-T/E 1x18-57 DIM	4008321060860	1
	QTi-T/E 2x18-42 DIM	4008321060846	2
	QT-M 2x26-42/220-240 S	4008321110022	2
	QTP-M 1x26-42	4008321329134	1