

---

# Product datasheet

## L 30 W/840

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases



- Public buildings Office lighting Industry Shops  
Supermarkets and department stores Street lighting  
Outdoor applications only in suitable luminaires

- Proven lamp technology Good economy thanks to high efficiency Available in many different light colors (2,700...8,000 K) for various applications



## Product datasheet

---

### Technical data


#### Electrical data

Nominal wattage	30.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated wattage	30.00 W
Lamp current	0.365 A
Nominal current	0.365 A

#### Photometrical data

Rated lamp efficacy (standard condition)	80 lm/W
Color rendering index Ra	≥77
Rated luminous flux	2400 lm
Luminous flux at	2400 lm
Light color	740
Rated color temperature	4000 K
Nominal luminous flux	2400 lm
Light color (designation)	LUMILUX Cool White
Rated LLMF at 2,000 h	0.96
Rated LLMF at 4,000 h	0.94
Rated LLMF at 6,000 h	0.93
Rated LLMF at 8,000 h	0.91
Rated LLMF at 12,000 h	0.91
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89
Color temperature	4000 K
Luminous flux	2400 lm

## Dimensions & weight



Tube diameter	26 mm
Length	895.0 mm
Length with base excl. base pins/connection	895.00 mm
Diameter	26.0 mm
Product weight	112.00 g
Outer bulb	T26
Maximum diameter	26.0 mm

## Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

## Lifespan

Service life	16000 h <sup>1)</sup>
Lifespan	20000 h <sup>1)</sup>
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.90
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	20000 h

<sup>1)</sup> With preheat ECG

## Additional product data

Base (standard designation)	G13
-----------------------------	-----

## Product datasheet

Mercury content	2.5 mg
Appropriate disposal acc. to WEEE	Yes

### Capabilities

Dimmable	Yes
Suitable for indoor	Yes

### Certificates & standards


Energy efficiency class	A
Energy consumption	36 kWh/1000h

### Country specific categorizations

Order reference	L 30W/840
-----------------	-----------

### Light Distribution

---

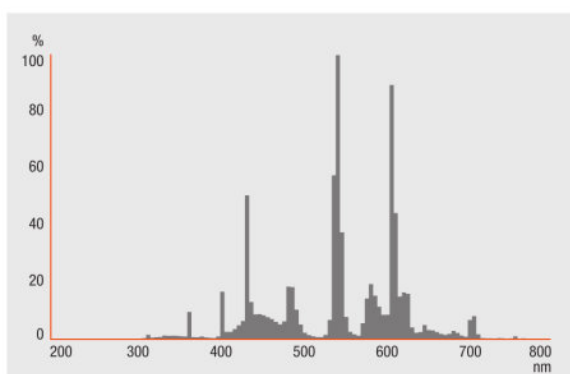

---

FL\_840

---

### System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs

## Product datasheet

---

DUO CIRCUIT

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300518039	L 30 W/840	Shipping carton box 25 Pieces Sleeves	781 mm x 306 mm x 145 mm	34.65 dm <sup>3</sup>	3872.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany

## L 30 W/840

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor $\lambda$ [PIM]	Luminous flux at 25 °C
L 30 W/840	QT-FIT 5/8 1x18-39	4008321873927	0.15 A	33.00 W	0.98	2350 lm
	QT-FIT 5/8 2x18-39	4008321873903	0.27 A	63.00 W	0.98	2350 lm
	QTi DALI 1x36 DIM	4050300870427	0.16 A	36.00 W	0.98	
	QTi DALI 2x36 DIM	4050300870885	0.31 A	69.00 W	0.98	
	QTP-OPTIMAL 1x18-40	4008321873743	0.15 A	36.00 W	0.95	
	QTP-OPTIMAL 2x18-40	4008321873767	0.28 A	63.00 W	0.98	

Product name	Product name ECG	EAN	Number of lighting outlets	Luminous flux at 35 °C
L 30 W/840	QT-FIT 5/8 1x18-39	4008321873927	1	
	QT-FIT 5/8 2x18-39	4008321873903	2	
	QTi DALI 1x36 DIM	4050300870427	1	2250 lm
	QTi DALI 2x36 DIM	4050300870885	2	2250 lm
	QTP-OPTIMAL 1x18-40	4008321873743	1	2850 lm
	QTP-OPTIMAL 2x18-40	4008321873767	2	2850 lm