

43

kWh/1000h

A

energy class

56

lumens/watt

ConstantColor™ CMH MR16

CMH35/MR16/UVC/U/942/GX10/WFL
TU

93102229

Product information

ConstantColor™ CMH lamps combine HPS technology (providing stability, efficiency & uniformity) and Metal Halide Technology (providing bright white quality light) to produce highly efficient light sources with good colour rendering and consistent colour performance through life.

This is achieved by using the ceramic arc tube material from the Lucalox™ lamp, which minimises the chemical changes inside the lamp through life.

Application areas



Retail



Industrial

Product data

Product Code	93102229
Bulb Shape	Mirrored reflector
Bulb Finish	Clear
Bulb Diameter [mm]	51
Maximum Overall Length [mm]	54.5
Net weight per piece [g]	64
Gross weight per piece [g]	100
Operating position	U - Universal
Mercury Content [mg]	3.5
UV radiance	Exempt
Brand	Tungsräm
Cap/Base	GX10

Performance data

Nominal/ Rated Beam Angle [°]	40
Nominal/ Rated Beam Angle (°)	40.7
Colour Code	942
Nominal center beam candlepower (CBCP) [cd]	3000
Rated peak intensity in [Cd]	3413
Rated Lumens [lm]	1866
Weighted energy consumption [kWh/1000h]	42.2
Useful lumens (at 90° cone) [lm]	1866
Nominal efficacy [LpW]	56
Rated efficacy [LpW]	48.6
Energy efficiency class (EEC)	A
Rated average life [h]	12000
Nominal chromaticity coordinate X	0.377
Nominal chromaticity coordinate Y	0.365
Nominal correlated colour temperature (CCT) [K]	4000
Nominal lumens [lm]	2200
Colour Rendering Index (CRI) [Ra]	92


Electrical data

Rated power [W]	38.4
Lamp Current [A]	0.4
Design Ambient Temperature [°C]	25
Run-up time (sec)	90
Hot restart time (sec)	390
Dimming Capability	No
Ballast Required	Yes
Nominal power [W]	39
Nominal lamp voltage [V]	90


Logistic data

DUN Code	15994100017551
EAN Code	5994100017554
Pack Quantity	12
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	288 EUR, 348 UK
Layer quantity EUR	288
Layer quantity UK	348
Pallet quantity EUR (PC)	4032
Pallet quantity UK (PC)	4872
Outer case size	226 x 171 x 77 (mm)
Product status	Available


Light distribution

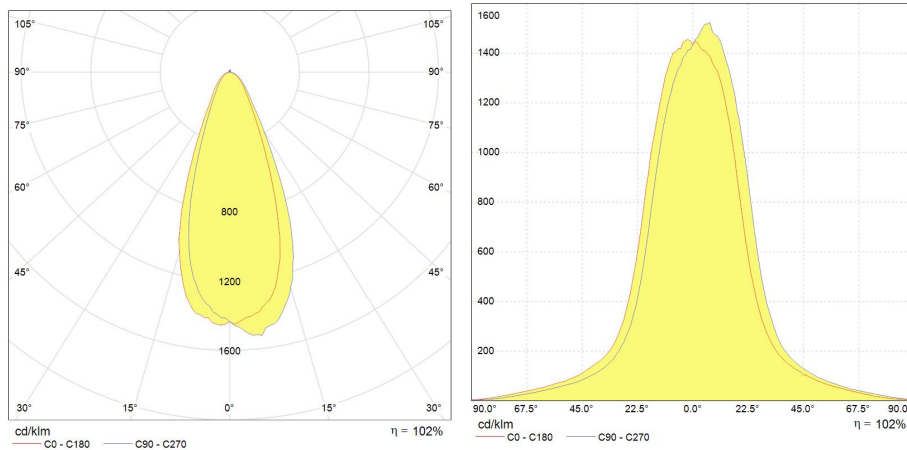

Lumen maintenance data

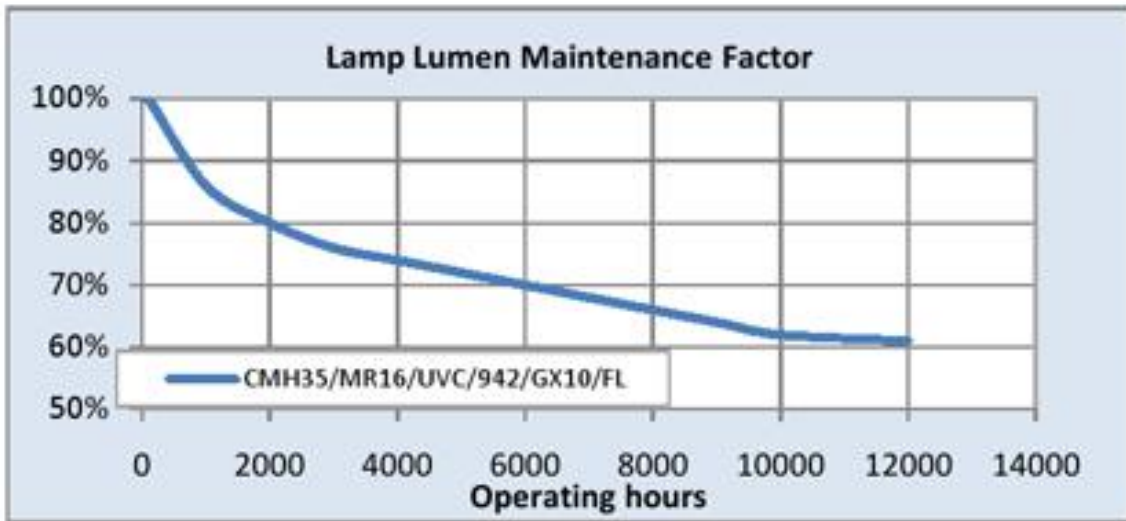

Survival data

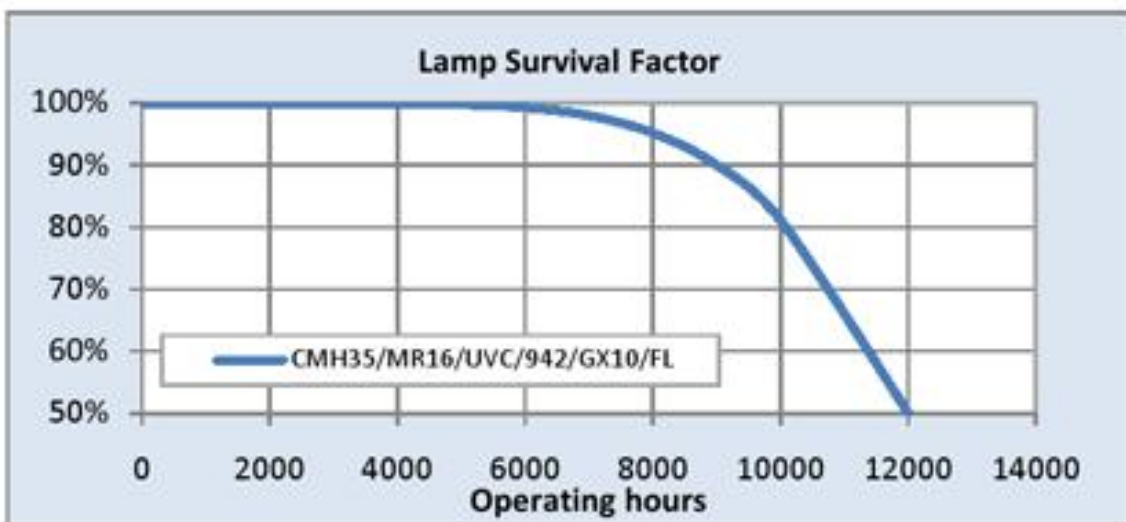

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Product datasheet \(PDF\)](#)

[High-res images / Technical drawings \(HTTP\)](#)



Tungram is a registered trademark of
Tungram Operations Kft.

tungram.com

We in Tungram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungram cannot accept any liability arising from the reliance on such data to the extent permitted by law.