



11
kWh/1000h

A+
energy class


115
lumens/watt

LED Plug In 4Pin Gen2

LED 10/G2/G24q-3/4P/H/830 TU BX1/6
93110771

Product information

LED 4 Pin Plug-In lamp offers safe, reliable and affordable energy saving alternative to Compact Fluorescent 4 Pin Plug-In lamps used in downlight fixtures. The replacement can be completed without tools or costly upgrade. The new GEN2 4Pin LED Plug-In lamp is available in 7.5W and 10W to replace 18W (G24q-2) and 26W (G24q-3) regular CFL lamps. The new lamp is designed for horizontal applications.

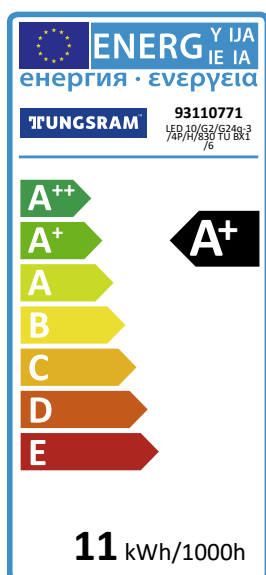

Product data

Product Code	93110771
Burn Position	Horizontal
Bulb Diameter [mm]	34.5
Bulb maximum overall diameter [mm]	34.5
Maximum Overall Length [mm]	162
Arc Gap	Horizontal
Net weight per piece [g]	125
Gross weight per piece [g]	147
Operating position	Horizontal
Mercury Content [mg]	0mg
RoHS compliant	Yes
Brand	Tungsrám
Cap/Base	G24q-3

Performance data

Nominal/ Rated Beam Angle [°]	110 x 120
Color consistency (SDCM)	<6 steps
Colour Code	830
Weighted energy consumption [kWh/1000h]	11.0
Rated efficacy [lm/W]	115
Rated efficacy 25°C HF preheat	118 x 80 x 178 mm
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	50000
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	1150
Colour Rendering Index (CRI) [Ra]	80

Electrical data

Operating Temperature [°C]	-20C ... +40C
Operating Temperature (MIN) [°C]	-20
Operating Temperature (MAX) [°C]	40
Starting ambient temperature range	-20°C to +40°C
Startup time [sec]	<0.5
Number of switching cycles	30000
Dimming Capability	No
Nominal power [W]	10

Logistic data

Shipment	Standard
DUN Code	15994100028250
EAN Code	5994100028253
Pack Quantity	6
Inner pack type	Bx
Outer pack type	outer bx
Layer quantity	EL 600 / UL 672
Layer quantity EUR	600
Layer quantity UK	672
Pallet quantity EUR (PC)	3600
Pallet quantity UK (PC)	4032
Outer case size	118 x 80 x 178 mm
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Product datasheet \(FR\) \(PDF\)](#)

[Images \(HTTP\)](#)

[LED PlugIn compatibility ballasts \(HTTP\)](#)

[Datasheet \(FR\) \(PDF\)](#)

