
TUNGSRAM

Innovation is our heritage EST. 1896







LED Stik- Dimmable LED DimSTIK 9(60)840 B22 TU 93104354

Product information

Tungsram keeps innovating and introduces the LED Stik- Dimmable to complete the most successful range* in the LED lamps to replace CFL and eCFL.

 LED Stik- Dimmable Led Lamp range won the IDEA Bronze design award in 2017 and the IF Design award in 2018

Application areas











LED Stik- Dimmable LED DimSTIK 9(60)840 B22 TU 93104354

Product data

Product Code	93104354
Bulb Shape	T38
Bulb Finish	White
Bulb maximum overall diameter [mm]	38
Nominal Length [mm]	114
Net weight per piece [g]	51
Dimmability	Yes
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	B22

Performance data

Nominal/ Rated Beam Angle [°]	240
Rated Lumens [lm]	810
Weighted energy consumption [kWh/1000h]	9.0
Rated efficacy [lm/W]	90
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]]	4000
Nominal lumens [lm]	810
Colour Rendering Index (CRI) [Ra]	80


Electrical data

Nominal lamp power factor	>0.7
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Starting time (sec)	<0.5 s
Warm up time up to 60% of full light output	Instant on
Number of switching cycles	50k
Number of switching cycles Nominal lamp voltage range [V]	50k 220-240V 50/60Hz

Logistic data

Shipment	Standard
DUN Code	15994100023590
EAN Code	5994100023593
Pack Quantity	15
Product status	Available

Light distribution

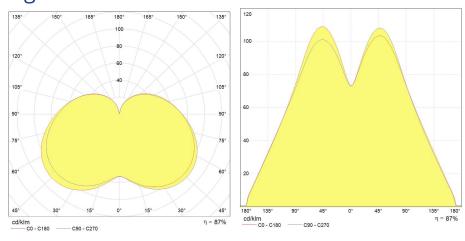



LED Stik- Dimmable LED DimSTIK 9(60)840 B22 TU 93104354

Downloads & Links

Go to the catalog site (HTTP)

Photometry (IES)

Product datasheet (PDF)

Datasheet (PDF)

User Manual for the Bright Stik™ products (PDF)

Images (HTTP)

DoC document (PDF)

Dimming compatibility (PDF)

