



HPL-N

HPL-N 250W E40 HG SLV/12

Standard High Pressure Mercury lamp

Product data

General Information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	6000 h
Life to 20% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	16000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	97 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	83 %
LSF 12000 h Rated	65 %
LSF 16000 h Rated	45 %
LSF 20000 h Rated	28 %
Light Technical	
Color Code	542 [CCT of 4200K]
Luminous Flux (Rated) (Nom)	12700 lm
Color Designation	Cool White (CW)
Lumen Maintenance 2000 h (Min)	78 %
Lumen Maintenance 2000 h (Nom)	88 %
Lumen Maintenance 5000 h (Min)	75 %
Lumen Maintenance 5000 h (Nom)	85 %
Chromaticity Coordinate X (Nom)	381
Chromaticity Coordinate Y (Nom)	383
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	51 lm/W

Color Rendering Index (Nom)	45
LLMF 2000 h Rated	88 %
LLMF 4000 h Rated	86 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	82 %
LLMF 12000 h Rated	78 %
LLMF 16000 h Rated	75 %
LLMF 20000 h Rated	72 %

Operating and Electrical	
Power (Rated) (Nom)	250.0 W
Lamp Current (EM) (Nom)	2.1 A
Ignition Supply Voltage (Max)	170 V
Voltage (Max)	145 V
Voltage (Min)	125 V
Voltage (Nom)	135 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Hard Glass

Approval and Application	
Energy Efficiency Label (EEL)	B

HPL-N

Mercury (Hg) Content (Nom)	38 mg
Energy Consumption kWh/1000 h	275 kWh

Luminaire Design Requirements

Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	250 °C

Product Data


Full product code	871150018060599
Order product name	HPL-N 250W E40 HG SLV/12

EAN/UPC - Product	8711500180605
Order code	928053007496
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928053007496
Net Weight (Piece)	0.166 kg
ILCOS Code	QE-250/41/3-H-E40

Warnings and Safety

- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




HPL N 250W E40 HG

Product	D (max)	C (max)
HPL-N 250W E40 HG SLV/12	91 mm	226 mm

Photometric data

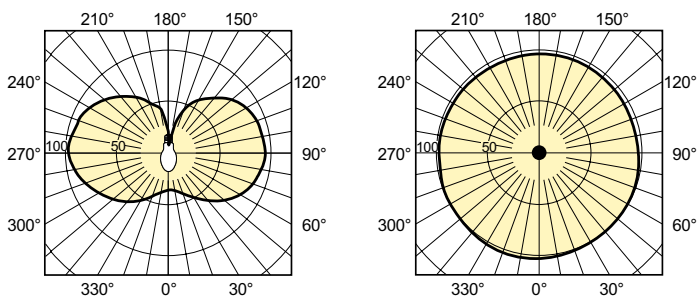



HPL-N 250W

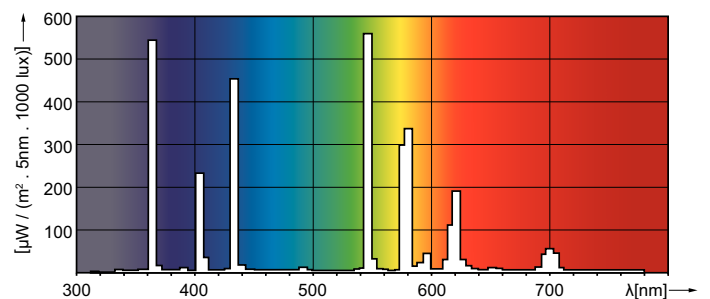

HPL-N

HPL-N

Lifetime

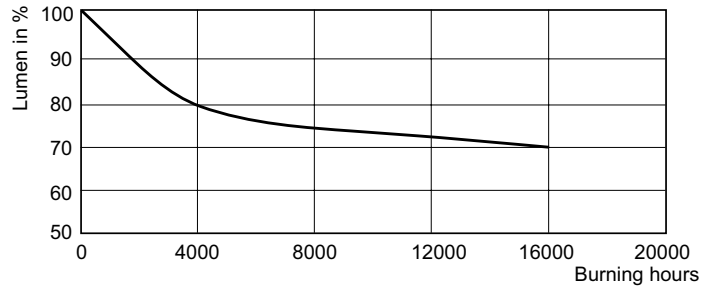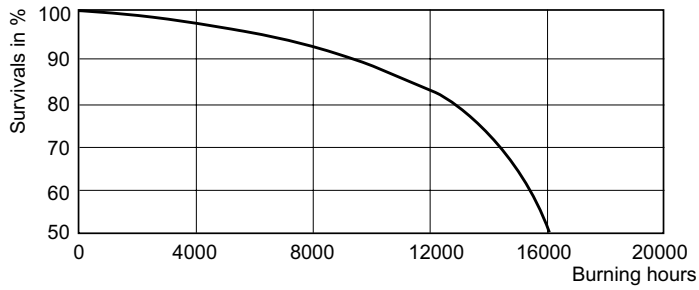

HPL Life Expectancy

HPL Lumen Maintenance

