



MASTER SON-T PIA Plus

MST SON-T PIA PLUS 100W/220 E40 SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Product data

General Information	
Cap base	E40 [E40]
Operating position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	17000 h
Life to 10% failures (nom.)	21000 h
Life to 20% failures (nom.)	26000 h
Life to 50% failures (nom.)	36000 h
ANSI code HID	-
System description	External Ignitor (E)
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	98 %
LSF 16000 h Rated	96 %
LSF 20000 h Rated	91 %
Light Technical	
Colour code	220 [CCT of 2,000 K]
Luminous flux (rated) (nom.)	10700 lm
Chromaticity coordinate X (nom.)	535
Chromaticity coordinate Y (nom.)	420

Correlated colour temperature (nom.)	2000 K
Luminous efficacy (rated) (nom.)	106 lm/W
Color rendering index (max.)	25
LLMF 2000 h Rated	98 %
LLMF 4000 h Rated	96 %
LLMF 6000 h Rated	95 %
LLMF 8000 h Rated	94 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	89 %
Ratio Scotopic/Photopic Lumens	0.55

Operating and Electrical	
Lamp supply voltage	230 V [230]
Power (Rated) (Nom)	100.0 W
Lamp current (EM) (nom.)	1.2 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	2800 V
Re-ignition time (min.) (max.)	120 s
Ignition time (max.)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V

MASTER SON-T PIA Plus

Voltage (Nom)	100 V
---------------	-------

Controls and Dimming

Dimmable	yes
Run-up time 90% (max.)	4 min

Mechanical and Housing

Bulb finish	Clear (CL)
Cap base information	na [-]

Approval and Application

Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	16.3 mg
Energy Consumption kWh/1000 h	110 kWh

Luminaire Design Requirements

Bulb temperature (max.)	450 °C
-------------------------	--------

Cap base temperature (max.)	250 °C
-----------------------------	--------


Product Data

Full product code	871150019230115
Order product name	MASTER SON-T PIA Plus 100W/220 E40 1SL/12
EAN/UPC – product	8711500192301
Order code	19230115
Local Code	100SONTPPLUS
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	928151709230
Net weight (piece)	0.128 kg
ILCOS Code	ST-100-H/S-E40

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing


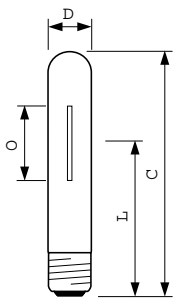


SON-T Plus 100W/220 E40


Product	D (max)	O	L	C (max)
MASTER SON-T PIA Plus 100W/220 E40 1SL/12	48 mm	47 mm	132 mm	210 mm

MASTER SON-T PIA Plus



Photometric data

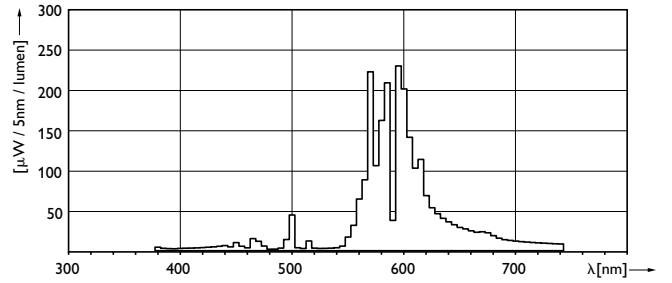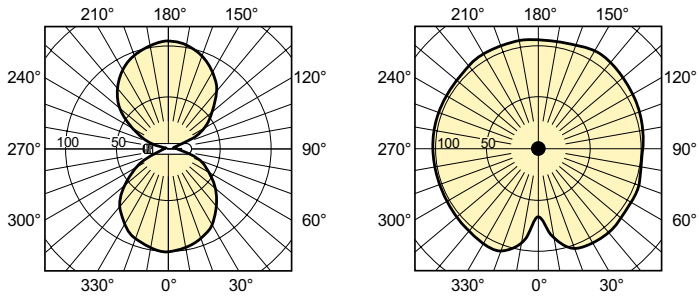

MASTER SON-T PIA Plus 100W, 150W & 250W

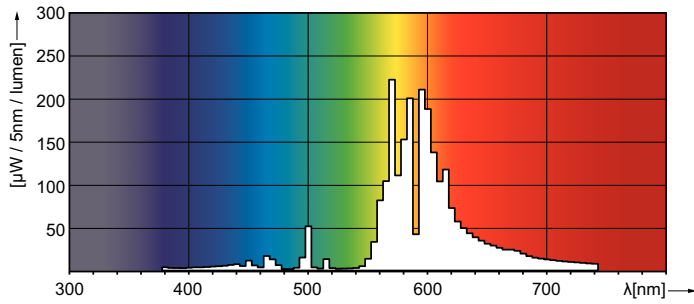

Lifetime

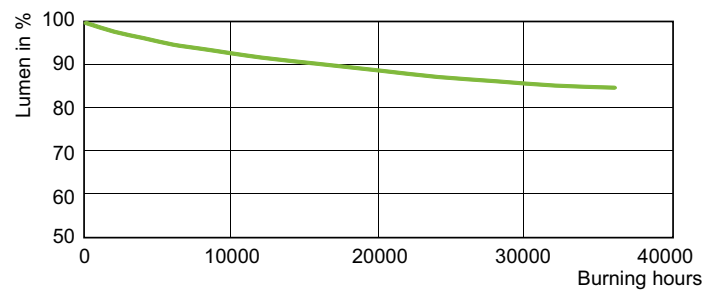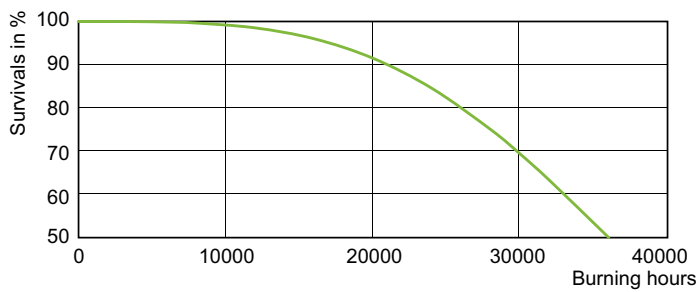

MASTER SON-T PIA Plus

