



MASTER PL-T 4 Pin

MASTER PL-T 26W/830/4P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

Product data

| General Information | |
|--------------------------------------|---------------------|
| Cap-Base | GX24Q-3 [GX24q-3] |
| Life to 50% Failures Preheat (Nom) | 13000 h |
| LSF Preheat 2000 h Rated | 99 % |
| LSF Preheat 4000 h Rated | 98 % |
| LSF Preheat 6000 h Rated | 97 % |
| LSF Preheat 8000 h Rated | 90 % |
| Light Technical | |
| Colour Code | 830 [CCT of 3000K] |
| Luminous Flux (Nom) | 1800 lm |
| Luminous Flux (Rated) (Nom) | 1725 lm |
| Colour Designation | Warm White (WW) |
| Colour Temperature, horizontal (Nom) | 3000 K |
| Luminous Efficacy (Rated) (Min) | 66 lm/W |
| Colour Rendering Index horiz (Nom) | >80 |
| Depreciation 2000 hrs | 92 % |
| LLMF 4000 h Rated | 88 % |
| Depreciation 5000 hrs | 86 % |
| LLMF 8000 h Rated | 84 % |
| LLMF 12000 h Rated | 81 % |
| Operating and Electrical | |
| Power (Rated) (Nom) | 24.0 W |

| Lamp Current (Nom) | 0.300 A |
|---------------------------------|------------------------------------|
| Temperature | |
| Design Temperature (Nom) | 28 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Mechanical and Housing | |
| Cap-Base Information | 4P |
| Approval and Application | |
| Energy Efficiency Label | A |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Energy Consumption kWh/1000 h | 29 kWh |
| Product Data | |
| Full product code | 871150061120870 |
| Order product name | MASTER PL-T 26W/830/4P 1CT/5X10BOX |
| EAN/UPC - Product | 8711500611208 |
| Order code | 61120870 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 50 |
| Material Nr. (12NC) | 927914683071 |
| Net Weight (Piece) | 64.000 g |


MASTER PL-T 4 Pin

ILCOS Code

FSM-26/30/1B-E-GX24q=3

Warnings and Safety

Dimensional drawing

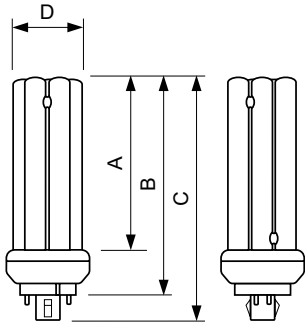


PL-T 26W/830/4P M


Product

MASTER PL-T 26W/830/4P 1CT/5X10BOX

Photometric data

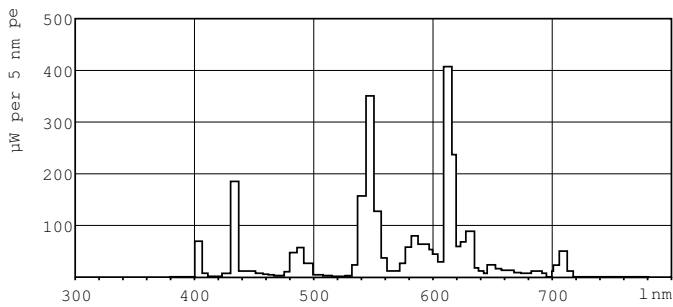


Lightcolour /830

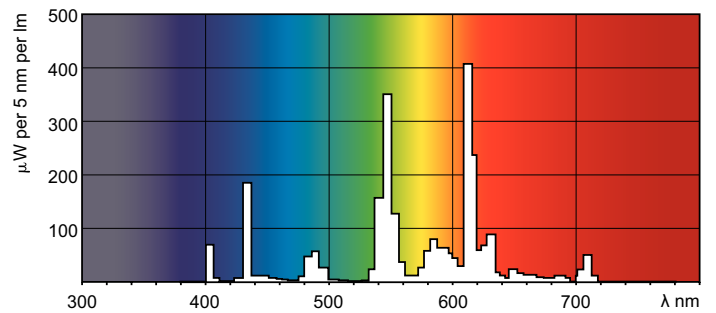

Lightcolour /830

Lifetime

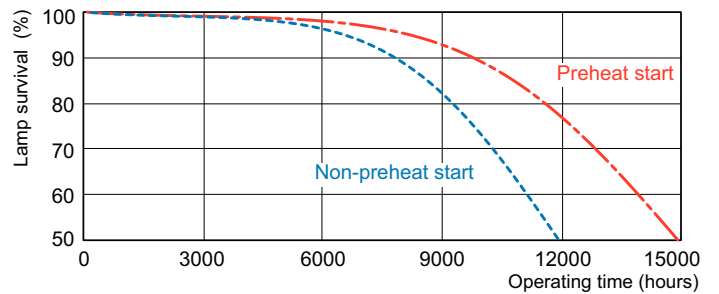

LDLE_PLT4PN_0002-Life expectancy diagram

MASTER PL-T 4 Pin

Lifetime



LDLM_PLT4PN_0001-Lumen maintenance diagram

