



TUV T8

TUV 75W HO 1SL/6

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Main application	Disinfection
Useful life (nom.)	9000 h
System description	High Output (HO)
Light Technical	
Colour code	TUV
Colour designation	- [Not Specified]
Depreciation at Useful Lifetime	10 %
Operating and Electrical	
Power (Rated) (Nom)	75 W
Lamp current (nom.)	0.84 A
Voltage (Nom)	110 V
Approval and Application	
Mercury (Hg) content (nom.)	2.0 mg


Warnings and Safety

UV	
UV-C Radiation	25.5 W
Product Data	
Full product code	87115006185110
Order product name	TUV 75W HO 1SL/6
EAN/UPC – product	8711500618511
Order code	6185110
Local Code	75TUVHO
Numerator – quantity per pack	1
Numerator – packs per outer box	6
Material no. (12NC)	928049404003
Net weight (piece)	135.000 g

TUV T8



Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 75W HO 1SL/6	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm



TUV TL-D 75W HO

Photometric data

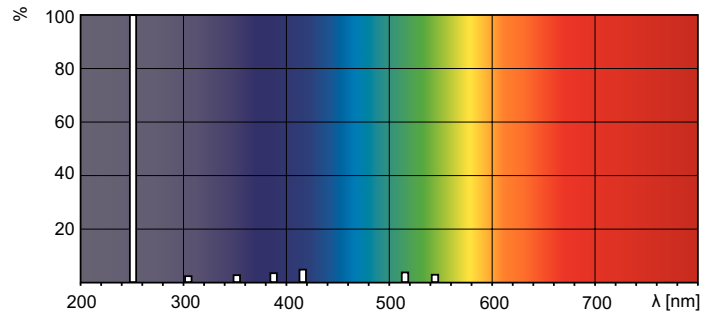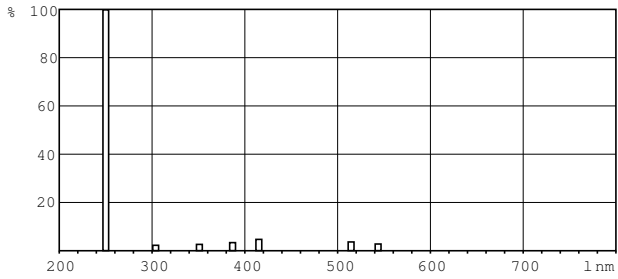

XDPB_XUTUVTLD-Spectral power distribution B/W

XDPO_XUTUVTLD-Spectral power distribution Colour

